


Standalone Range Radio Range

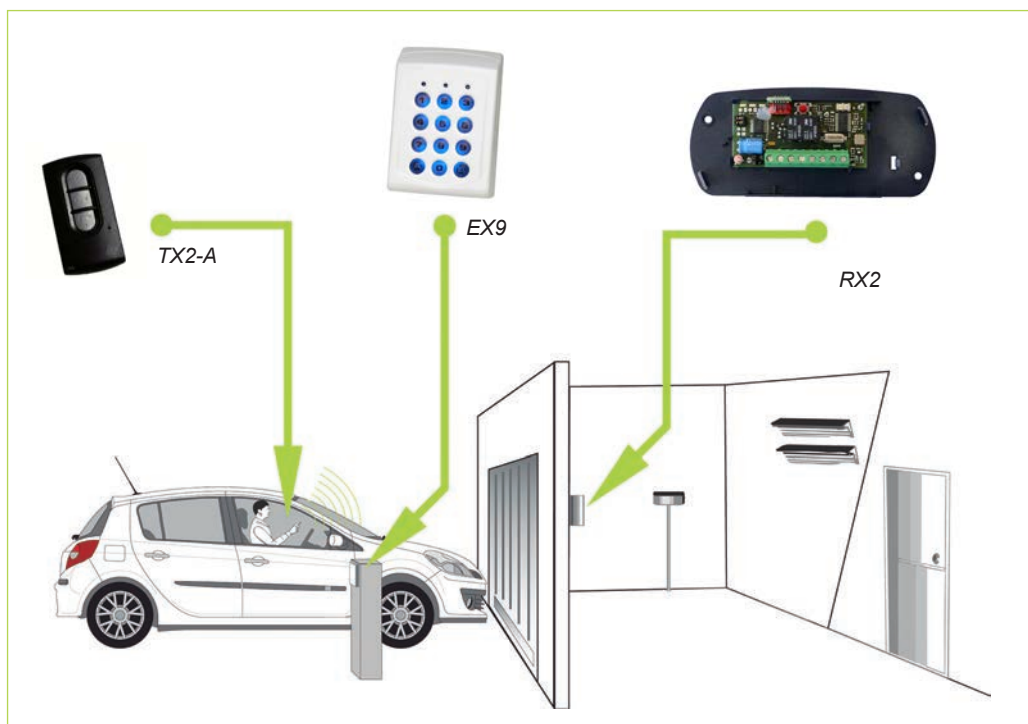

Ref.	EX9	RX2	TX2-A
Features	Radio keypad	Radio receiver	Remote Frequency: 433.92Mhz

Choose your kit:
2 kits available for
the radio range

EX9

Keys: **Backlit polycarbonate**
Channels: **10**
Programming Master Code: **1**
Users codes: **99**
Relays time setup: **1 to 10 seconds**
Range: **120 mt in open space**
Green led: **Key press/ error and confirmation signal/ transmission in progress**
Red led: **Keypad locked indicator**
Orange led: **Menu set up configuration**
Buzzer: **1**
Power supply: **12/24V AC/DC input and/or 9V battery**
Consumption: **27mA in transmission with 9V battery 120mA in transmission with 24Vac power supply**
IP rating: **65**
Dimensions (mm): **119,5x83,5x40**

RX2

Codifying: **Rolling code**
Memorisable transmitters: **1000 with memory - 30 without memory**
Power supply: **12 V AC/DC Jumper C closed 24 Vac/dc Jumper C**
Consumption: **open 50mA**
Channels: **2**
Antenna: **Tuned at 433.92 MHz**
Frequency: **433.92 MHz**
Reach: **80 - 250 mt**
Relay contact: **1A up to 30 Vdc / 0.5A up to 42.4 Vac**
Temperature: **-10...55 °C**



Ref.	EX9 Kit	TX2-A Kit
Features	The EX9 Kit contains a wireless rolling code keypad (EX9-43B) as a transmitter and a radio receiver (RX2). Only programmed codes in the keypad and memorised in the receiver will activate the relay output. The receiver can also memorise rolling codes from the remote control TX2A (not included).	The TX2A-KIT contains 2 remote control TX2A as a transmitter and a radio receiver RX2.