

SCUTI

HYDRAULIC OPERATOR FOR OVERHEAD DOORS
FOR RESIDENTIAL OR INDUSTRIAL USE.
MAX DOOR WEIGHT: 16KGS/MQ.

Hydraulic reliability, silent and safe also in overhead doors

- Hydraulic high quality operator for a perfectly harmonious movement for overhead doors of max weight 16 kgs/mq.
- SEA TOTAL QUALITY: All main parts are manufactured and tested in-house.
- The working of the operator through oil and the inner lubrication of all the mechanical components grant a long time lasting.
- Extremely silent thanks to the hydraulic system.
- Hydraulic slow down in closing.
- Anti-intrusion safety by inner lock.
- Force adjusting by-pass valves as anti-crushing safety.
- Manual, inner release system. External release with customized key optional.
- The hydraulic lock tightness is warranted for doors of max width down to 3,5 m. If the door width is over 3,5 m. use 2 SCUTI operators.




NAME	MAX DOOR DIMENSION	MAX DOOR WEIGHT	CYCLES/HOUR
SCUTI SB*	3 h x 3,5 l - (3 h x 5 l)**mt.	16 kg/mq	60
SCUTI AC	3 h x 3,5 l - (3 h x 5 l)**mt.	16 kg/mq.	60


*With the operator without SCUTI SB lock, it is necessary to install the electric lock.
**Dimensions related to the use of two lateral operators with over 3,5 mt of width.

SCUTI PACKAGE

- N.1 Scuti operator
- N.1 Accessories kit for installation
- N.1 Starting capacitor
- N.1 Instructions for installation and general notice
- N.1 Warning plate

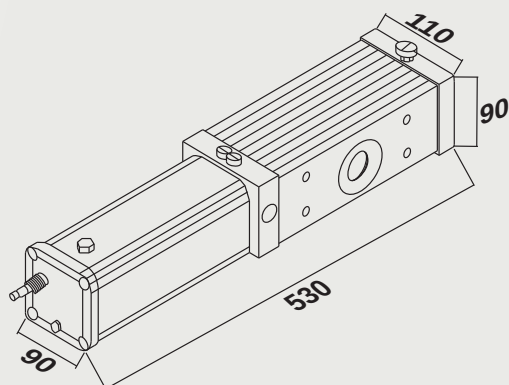

Dimensions (mm)

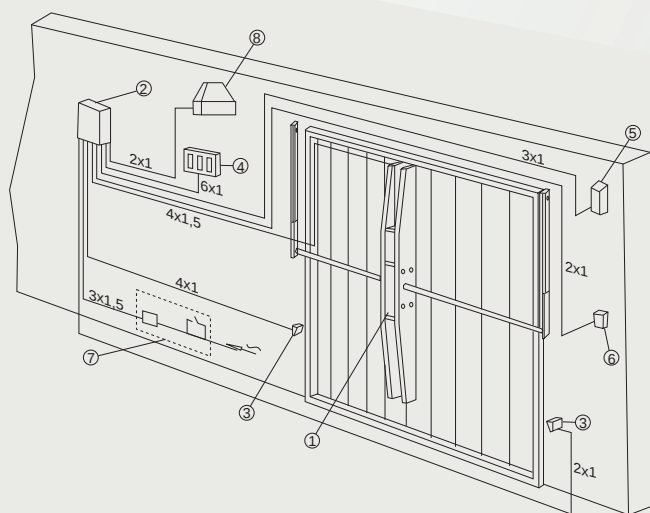

STANDARD INSTALLATION

- 1-SCUTI OPERATOR
- 2-ELECTRONIC UNIT
- 3-PHOTOCELL
- 4-PUSH BUTTON BOARD

- 5-RADIO RECEIVER
- 6-KEY PUSH BUTTON BOARD
- 7-DIFFERENTIAL SWITCH
- 8-FLASHING LAMP

CONTROL UNITS

Page 75-77

Standard	Gate 1
Optionals	Swing - Sw. Pro - Gate2

ACCESSORIES

Access. for overhead, sect. and folding doors	Pg 53-54
General accessories	Pg 82-87