



The transmitter TMU99 has been created to control a large number of users

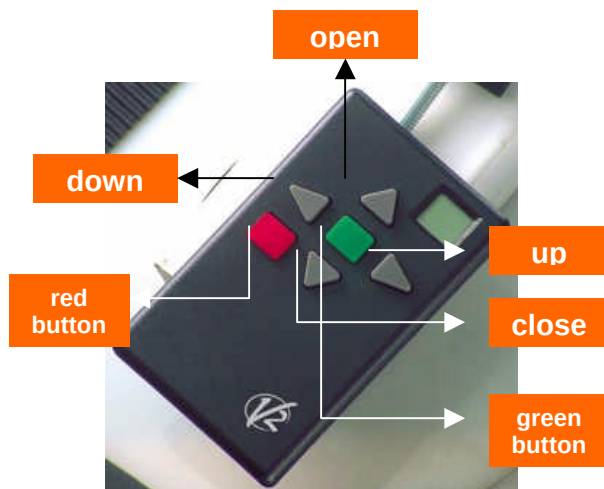

DIMENSIONS OF
THE DISPLAY:
11X11mm

TMU99 is equipped with a “two-digit and backlit” display and four push-buttons which allow you to select a channel between 1-99 (by pressing push-buttons UP/DOWN) and transmit a frame to command opening and closing (by pressing push-buttons OPEN/CLOSE).

The red and green push-buttons allow additional functions.

UP/DOWN PUSH-BUTTONS

Selection of the desired channel (the display shows a channel from 0,1 to 99). By keeping the key pressed, the fast channel scrolling is activated.

OPEN/CLOSE PUSH-BUTTONS

It is the opening or closing command. The display shows the current channel during its whole transmission time.

GREEN PUSH-BUTTON

It is the opening command of the most used channel.

RED PUSH-BUTTON

It is the closing command of the most used channel.

DEFINITION OF THE LAST CHANNEL

It's possible to define the last channel so that the selection can be limited to the used channels only.

1. Press GREEN and RED buttons together for 10 seconds;
2. press UP or DOWN push buttons to define the last channel;
3. press RED push-button to confirm the last channel.

DEFINITION OF THE MOST USED CHANNEL

It is possible to define the most used channel. GREEN push-button will be the opening command of the most used channel; RED push-button will be the closing command of the most used channel.

1. Press GREEN and RED buttons together for 10 seconds;
2. press UP or DOWN push buttons to define the most used channel;
3. press GREEN push-button to confirm the most used channel.

KEYBOARD LOCK FUNCTION

It is possible to lock the keyboard by pressing RED and DOWN push-buttons together for 2 seconds (Display shows "**b L**"). To unlock the keyboard, press RED and DOWN push-buttons together till display will show the last channel used.

BACKLIGHT FUNCTION

It is possible to activate the backlight function by pressing GREEN and UP push-buttons together for 2 seconds. Follow the same procedure to disable the back light function.

STAND-BY MODE OPERATION

The remote control TMU99 will self-switch off 5 seconds after the last key pressure to minimize consumption.

DOWN BATTERY INDICATION

In case of down battery, display will show "**L b**" before the number of the channel activated.

Frequency:	433,92 MHz
Irradiated power:	< 0,3 mW
Modulation:	AM (on off)
Absorption:	14 mA
Battery:	Alcaline 1,5 Volt – micro LR03 (1,1 Ah)

Life-time of the battery: 90.000 transmissions of 3 seconds
1 year with 240 transmissions per day of 3 seconds