


stark3

REF.BRA191/192

Irreversible electromechanical actuator


for swing gates
with leaves **up to 3 m in length**

Available in two versions:
24V and **230V**

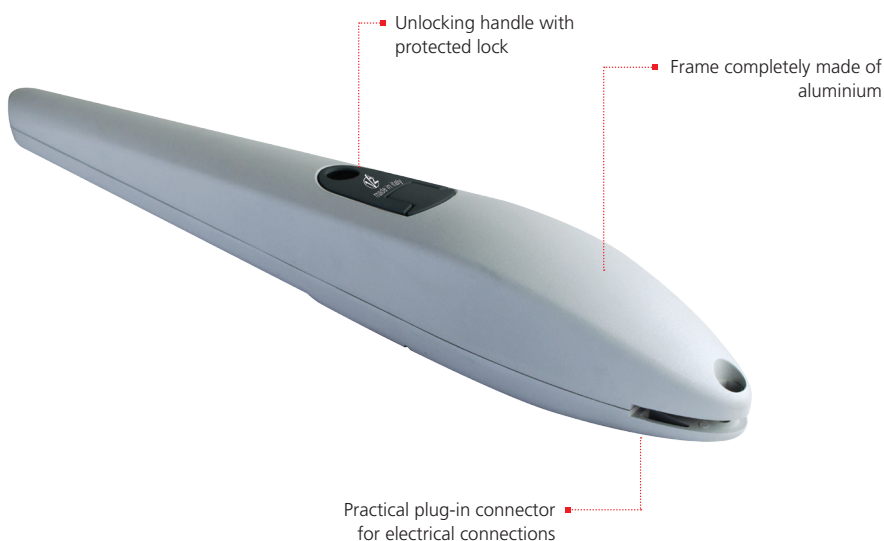

PLUS

- Equipped with opening mechanical limit stop
- Mechanical closing stop available as an accessory
- Single version for both right and left leaves
- Adjustable fixing brackets to speed up engine installation

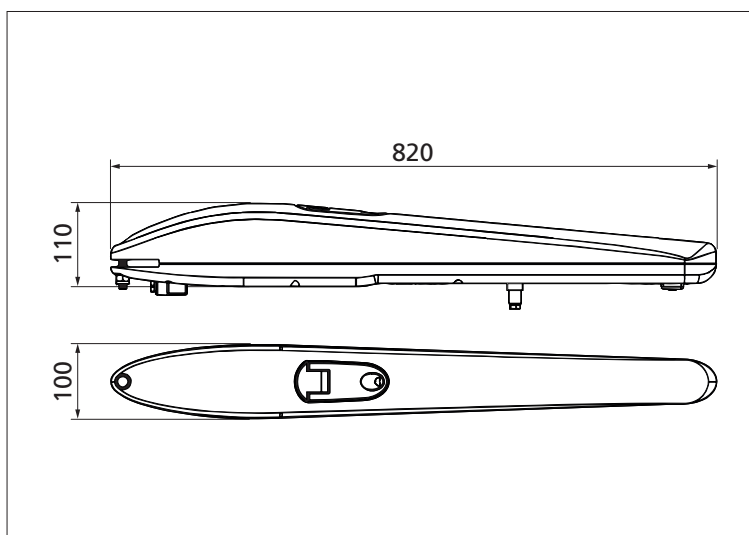

TECHNICAL FEATURES

Description	230V for leaves up to 3 m	24V for leaves up to 3 m
MODEL	STARK3-230V	STARK3-24V
Ref. Nestor	BRA191	BRA192
Maximum leaf length (m)	3	3
Maximum leaf weight (Kg)	600	600
Power supply (Vac - Hz)	230 - 50	24 Vdc
Idling current (A)	1	0,8
Full load current (A)	1,6	15
Maximum electric power (W)	200	120
Opening time of the leaf 0 ÷ 90° (s)	18,5	15
Maximum travel (mm)	360	360
Operating speed (m/s)	0,016	0,020
Maximum thrust (N)	2000	2000
Working temperature (°C)	-20 ÷ +55	-20 ÷ +55
Protection degree (IP)	44	44
Duty cycle (%)	30	90
Motor weight (Kg)	8	7

stark3

REF.BRA191/192



CONTROL UNITS TO BE USED



CITY1-EVO	CITY11	CITY2+
Digital control unit for 230V motors	Analogue control unit for 230V motors	Digital control unit for 24V motors. Available in version with power supply at 230V or 120V.

ACCESSORIES



162258	ACC009
Adjustable mechanical stop (pack of 2 pcs.)	Warning sign

stark3 kit

	Kit MODEL	CONTROL UNIT	PHOX2	MR2	SENSIVA-XS	LUMOS-M	ACC009	CODICE Kit
230V	Kit Light STARK3-230V	CITY1-EVO	■ ■	■				29H005
	Kit Full STARK3-230V	CITY1-EVO	■ ■	■	■	■	■	29H006
24V	Kit Light STARK3-24V	CITY2+	■ ■	■				29H003 Ref.Nestor Kit935
	Kit Full STARK3-24V	CITY2+	■ ■	■	■	■	■	29H004