



HT Electrohydraulic

Hydraulic operator in law voltage (24V)



**24V DC
HYDRAULIC
TECNOLOGY**



Systems for
swing gates



- Oil lubrication
- High Anti-crashing security through control unit with detecting ammeter
- Power and slow down adjustable on control unit USER.
- Versions with lock in both directions (AC) only in opening (SA) and without lock (SB).
- Application of emergency batteries for functioning in case of black -out possible.
- On request mechanical and electronic limit switches in opening and closing (optional)
- Mechanical and electronical limit switches in opening and closing (on request)

HT 24V

TECHNICAL SPECIFICATIONS


Specifications	HT 24V
Power supply	230 Vac $\pm$ 5% 50/60 Hz
Motor power	70W/230W
Shaft Stroke	400 mm
Cycles/hour	20/40
Max leaf length	5 m
Oper. temperature	from -22 °C to + 55 °C
Max leaf weight	700 Kg
Weight	10 kg
Opening degrees	90°/120 °
Protection class	IP 55
Starting capacitor	6,3 μ F
Max thrust	200 daN

New metal release
system PLUS




USER 2 24V

- Administration of two 24V motors
- Adjustable slow down in opening and closing
- Motor speed adjustment
- Pedestrian opening
- 24V warning lamp on board
- Electric lock administration
- Emergency battery administration and solar panel
- Working time self-learning
- Incorporated radio decoding compat. with radio transmitter SMART, HEAD, COCCINELLA series and SMART E-COPY (800 users) with optional radio frequency module (RF)
- Ammeter function to reveal obstacles
- Simplified programming with push buttons
- Leaf delay adjustment
- Functioning motors' speed
- Bus accessories management (photocells and lamp)
- Limit switch management
- Self-diagnostic
- Additional adjustable with PALM USER device
- Management security edge
- Pause management

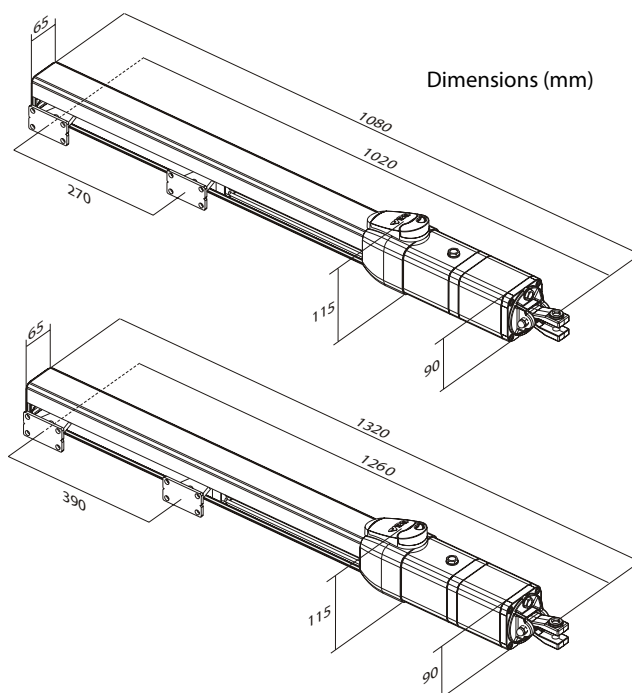

Standard installation

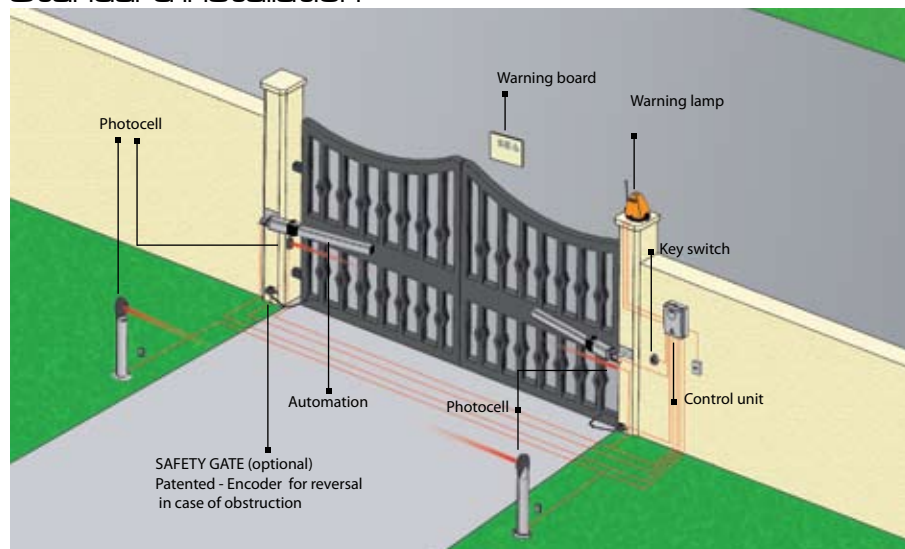

Zona Industriale S. Atto (TERAMO) ITALIA
Tel. +39 0861 588341 r.a. Fax +39 0861 588344
seacom@seateam.com - www.seateam.com

SERVIZIO CLIENTI
840-000-440

PRODOTTI
CE

