



Half Tank 24V DC

HYDRAULIC SWING GATE OPERATOR MAX LEAF LENGTH UP TO 5M

Ref. Nestor CUS245/246



Platinum
5 Years
Warranty



- Noiseless and hydraulic reliability
- High anti-crushing safety
- Emergency batteries and solar panel KIT SUNNY (optional)
- Standard aluminum oscillating back fixing fork
- 20 mm rod diameter
- Piston stroke 270 mm - 390 mm
- Force and slow down adjustment on USER 2-24V DG HYDRO SW/LE control unit
- Low absorption motor
- Integrated absolute linear encoder POSITION GATE
- Voltage regulator on board USER 2 24V DG HYDRO SW/LE



POSITION GATE
Linear Encoder (standard)
Encoder assoluto lineare (di serie)



Metal release with personalized key.
Sistema di sblocco e chiave personalizzata SEA






Round joint for stroke adjustment
Snodo sferico per regolazione millimetrica in caso di ante non perfettamente allineate

CODE	NAME	MAX LEAF WEIGHT (KG)	MAX LEAF LENGTH	MAX OPENING DEGREE	MAX CYCLES/ HOUR /	PCS PER PALLET
CUS245	HALF TANK 270 AC 24V with Position Gate	700	1,8*	120°	70	40
CUS246	HALF TANK 390 AC 24V with Position Gate	700	2,2*	120°	70	27

*Over 1,8 m use electric lock. (do not use AC models on panelled gates) * Oltre 1,8 m usare elettroserratura (non usare modello AC su cancelli pieni)

DIMENSIONS (mm)

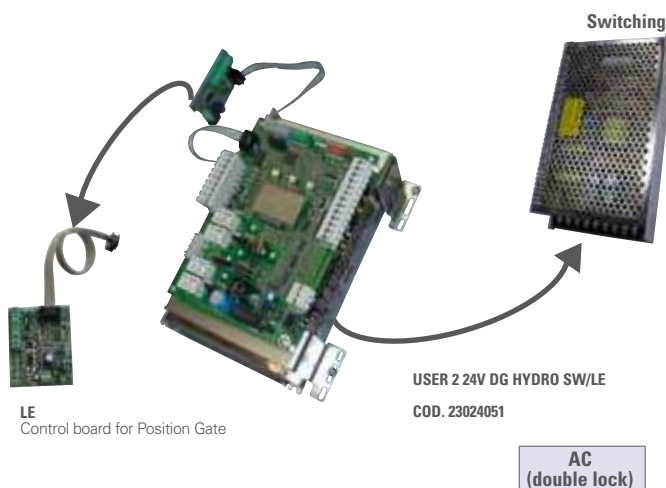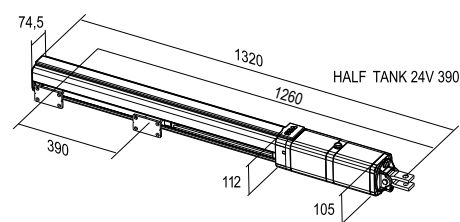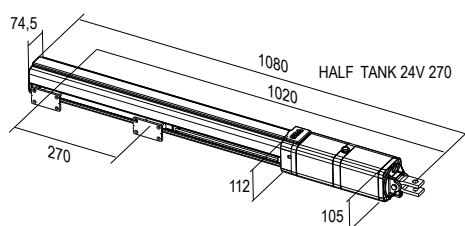

nestor
company

The most complete supplier of
Security - Intercom - Automation - Parking Solutions