



KIT 949/950 Half Tank 24V DC

KIT HYDRAULIC SWING GATE OPERATOR



MAX LEAF LENGTH UP TO 5M



- Noiseless and hydraulic reliability
- High anti-crushing safety
- Emergency batteries and solar panel KIT SUNNY (optional)
- Standard aluminum oscillating back fixing fork
- 20 mm rod diameter
- Piston stroke 270 mm - 390 mm
- Force and slow down adjustment on USER 2-24V DG HYDRO VR ALL IN control unit
- Low absorption motor
- Integrated linear encoder POSITION GATE
- Voltage regulator on the board USER 2 24V DG HYDRO SW/LE





POSITION GATE
Linear Encoder (standard)



Metal release with personalized
key.



Round joint for stroke adjustment

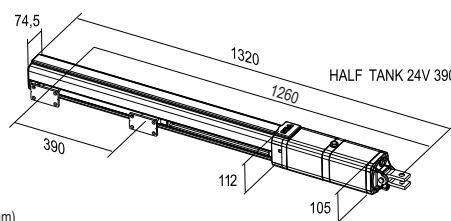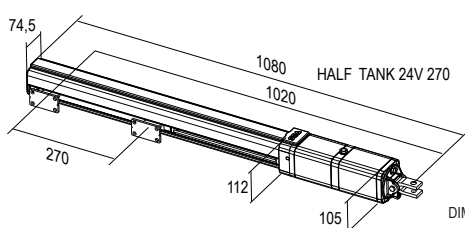

DIMENSIONS (mm)

CODE	NAME	MAX LEAF WEIGHT	MAX LEAF LENGTH	MAX OPENING DEGREE	MAX CYCLES/ HOUR
KIT949	2X HALF TANK 270 AC 24V + USER2	700	1,8*	120°	70
KIT950	2X HALF TANK 390 AC 24V + USER2	700	2,2*	120°	70

*Over 1,8 m use electric lock. (do not use AC models on panelled gates)

ACCESSORIES




23106305
BAT7 (7AH)
Battery kit with box



12715070
BRA
Adjustable back bracket
to screw 2 N. pcs



65000045
OILH
Green oil (5 liters)

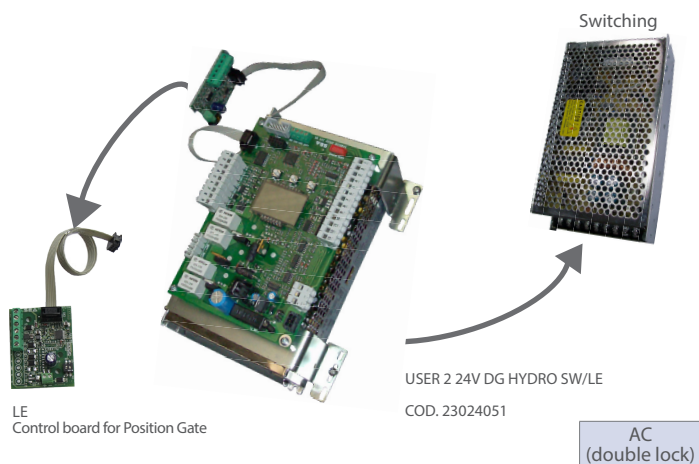


LE
Control board for Position Gate

USER 2 24V DG HYDRO SW/LE
COD. 23024051

AC
(double lock)



23101104
ESUN Q
Battery charger 800 mA
with solar panel admin



23106370(*)
Kit SUNNY
20W solar panel + control
unit ESUN Q + battery 12Ah



12715071
BRASS
Back/Front Stainless
steel bracket kit



NOTE: 23101104 to combine with 23106305 (*) KIT SUPER SUNNY for more power