

I

Ruote in C45 con 2 cuscinetti predisposte per perno ingrassatore - gola O

UK

Wheels with two bearings preset for lubricator pin - O groove

D

Laufrollen mit zwei Lagern - O Nut

F


Roues avec 2 roulements pour axes avec graisseur - gorge O

E

Ruedas con 2 cojinetes preparadas para ingrassador - guía O

RUS

Ролик нормальный с 2 подшипниками для оси с масленкой паз O

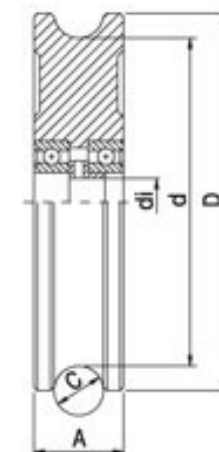

Compatibile con

NEWOMEGA

NEWOMEGA2

FLOOR

HEAVY

IBBI

SISTEMA

Articolo - Article		D	d	di	A	C	Portata Capacity		
Riferimento - Reference		Ø			mm	O	👤 x1	N°	👤
10030 I O	RT 10 30 03	100	81	20	30	21	450	12	14,6
12030 I O	RT 12 30 03	120	101	20	30	21	490	8	15,1
14030 I O	RT 14 30 03	140	121	20	30	21	530	4	10,9
16038 I O	RT 16 38 03	160	141	20	38	21	640	2	9,5
18038 I O	RT 18 38 03	180	161	20	38	21	680	2	12,2
20038 I O	RT 20 38 03	200	181	20	38	21	720	2	15,3
25038 I O	RT 25 38 03	250	231	20	38	21	870	2	24,9