

I Ruote in C45 con 2 cuscinetti predisposte per perno ingrassatore - gola V

UK Wheels with two bearings preset for lubricator pin - V groove

D Laufrollen mit zwei Lagern - V Nut


F Roues avec 2 roulements pour axes avec graisseur - gorge V

E Ruedas con 2 cojinetes preparadas para ingrassador - guía V

RUS Ролик нормальный с 2 подшипниками для оси с масленкой паз V



Compatibile con
ANGULA

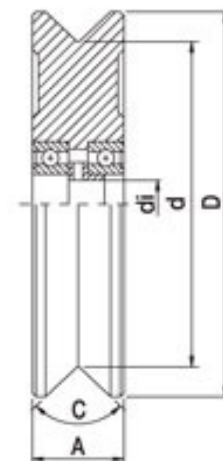

Articolo - Article		D	d	di	A	C	Portata Capacity		
Riferimento - Reference		Ø			mm	V	🔧 x1	N°	🔧
10030 I V	RT 10 30 V3	100	80	20	30	96°	450	12	15,2
12030 I V	RT 12 30 V3	120	100	20	30	96°	490	8	15,7
14030 I V	RT 14 30 V3	140	120	20	30	96°	530	4	11,4
16038 I V	RT 16 38 V3	160	133	20	38	96°	640	2	9,3
18038 I V	RT 18 38 V3	180	153	20	38	96°	680	2	12
20038 I V	RT 20 38 V3	200	173	20	38	96°	720	2	15
25038 I V	RT 25 38 V3	250	223	20	38	96°	870	2	24,6