

I
UK
D
F
E
RUS

Ruote in C45 normali a 1 cuscinetto - gola V


Normal wheel with one bearing - V groove

Laufrollen mit einem Lager - V Nut

Roues normales avec 1 roulement - gorge V

Ruedas normales con 1 cojinete - guía V

Ролик нормальный с 1 подшипником паз V

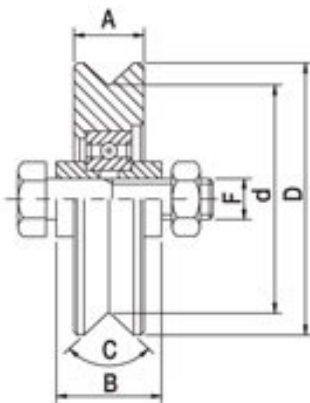

Compatibile con

ANGULA



Articolo - Article		D	d	A	B	C	F	LxHxS	Portata Capacity		
Riferimento - Reference		∅		mm		V	UNI	mm	🛠 x1	N°	🛠
518 V	RT 50 18 V1	50	39	18	24	96°	M 10x45	50x30x3	75	30	7,2
618 V	RT 60 18 V1	60	49	18	24	96°	M 10x45	60x30x3	110	30	10,2
718 V	RT 70 18 V1	70	59	18	24	96°	M 10x45	60x30x3	160	20	10
820 V	RT 80 20 V1	80	65	20	24	96°	M 12x50	80x30x3	190	20	13
920 V	RT 90 20 V1	90	75	20	24	96°	M 12x50	80x30x3	220	20	17
1020 V	RT 10 20 V1	100	85	20	34	96°	M 14x60	100x40x3	240	20	22,4
1220 V	RT 12 20 V1	120	105	20	34	96°	M 14x60	120x40x3	270	12	19,6
1420 V	RT 14 20 V1	140	125	20	34	96°	M 14x60	120x40x3	310	6	13,5
1620 V	RT 16 20 V1	160	145	20	34	96°	M 14x60	140x40x3	350	6	17,6