

I

Ruote in C45 a 2 cuscinetti con supporto chiuso - gola V

UK

Wheels with closed support with two bearings - V groove

D

Laufrollen mit Stützplatten, zwei Lagern - V Nut

F


Roues à 2 roulements avec support fermé - gorge V

E

Ruedas con soporte cerrado con 2 cojinetes - guía V para soldar o atornillar

RUS

Ролик с 2 подшипником с закрытым кронштейном паз V

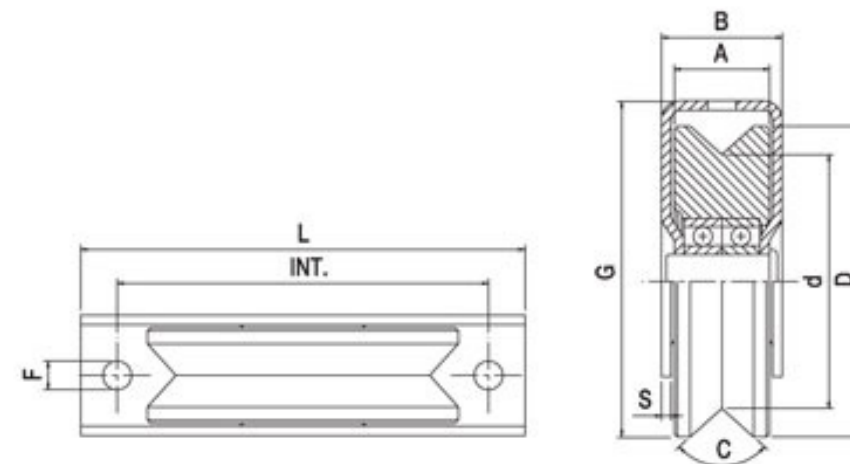

Compatibile con

ANGULA

Articolo - Article	D	d	A	B	C	G	S	L	Int. x F	Portata Capacity		
Riferimento - Reference	$\varnothing$		mm		V	mm			mm	x1	N°	
1030 PCV RT 10 30 VC	100	80	30	38	96°	106	3	140	108 x $\varnothing 9$	350	8	15,1