

I

Ruote in C45 a 2 cuscinetti con supporto - gola V

UK

Wheels with 2 bearings support - V groove

D

2-Drucklager Räder - V Nut

F


Route avec support à 2 roulements - gorge V

E

Ruedas con soporte formado por 2 rodamientos - guía V para atornillar

RUS

Колесо с одним опорным подшипником паз O

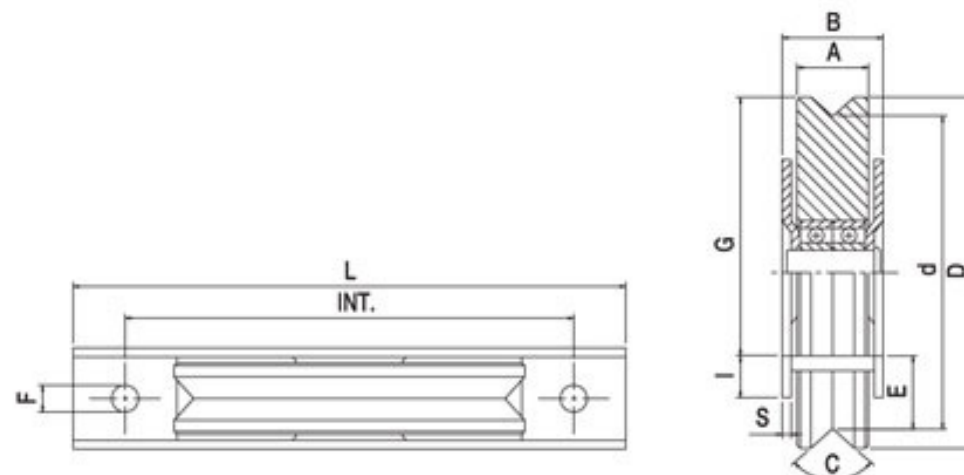

Compatibile con

ANGULA

Articolo - Article		D	d	A	B	C	G	I	E	S	L	Int. x F	Portata Capacity		
Riferimento - Reference		Ø		mm		V	mm								
822 PSV	RT 80 22 VS	80	65	24	34	96°	58	12	13,5	3	140	117 x ø9	280	12	11,8
922 PSV	RT 90 22 VS	90	75	24	34	96°	63	12	18,5	3	140	117 x ø9	300	12	14,9
1022 PSV	RT 10 22 VS	100	85	24	34	96°	68	12	23,5	3	140	117 x ø9	340	10	14,3
1224 PSV	RT 12 24 VS	120	102	24	38	96°	88	14	22	3	185	150 x ø9	430	6	14