

I Ruote in C45 a 2 cuscinetti con supporto saldato con perno ingrassatore - gola V



UK Wheels with welded 2 bearings support with lubricating pin - V groove

D 2-Drucklager Räder mit Fettpressestift - V Nut

F Roues avec support soudé à 2deux roulements inox avec pivot graisseur - gorge V

E Ruedas con soporte saldato a 2 rodamientos con pernio lubricador - guía V para atornillar

RUS Колесо с двумя приваренными опорными подшипниками и смазочным устройством оси паз V

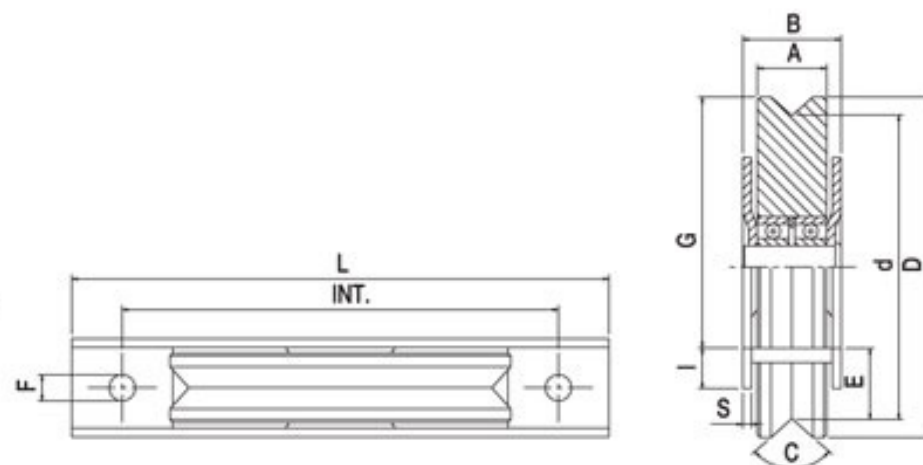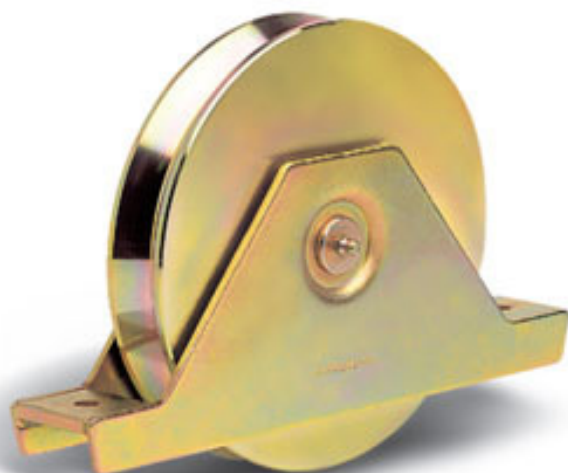

Compatibile con

ANGULA

Articolo - Article		D	d	A	B	C	G	I	E	S	L	Int. x F	Portata Capacity		
Riferimento - Reference		Ø		mm		V	mm								
1630 PSV	RT 16 30 VI	160	140	30	44	96°	125	22	24	4	261	226 x ø9	500	2	10,5
1830 PSV	RT 18 30 VI	180	160	30	44	96°	135	22	34	4	261	226 x ø9	580	2	12,5
2030 PSV	RT 20 30 VI	200	160	30	44	96°	145	22	44	4	261	226 x ø9	730	2	13