

I Ruote in C45 a 2 cuscinetti con supporto saldato con perno ingrassatore - gola O


UK Wheels with welded 2 bearings support with lubricating pin - O groove

D 2-Drucklager Räder mit Fettpressestift - O Nut

F Roues avec support soudé à 2deux roulements inox avec pivot graisseur - gorge O

E Ruedas con soporte saldato a 2 rodamientos con pernio lubricador - guía O para atornillar

RUS Колесо с двумя приваренными опорными подшипниками и смазочным устройством оси паз O

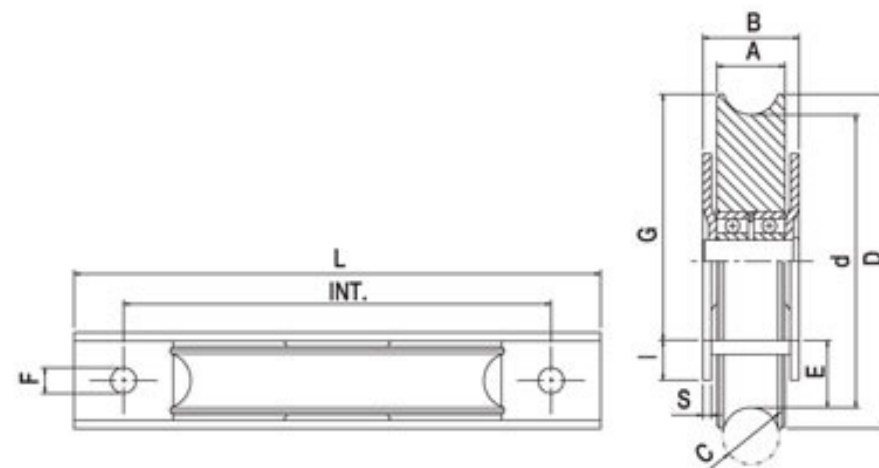

Compatibile con

NEWOMEGA

NEWOMEGA2

FLOOR

HEAVY

IBBI

SISTEMA

Articolo - Article		D	d	A	B	C	G	I	E	S	L	Int. x F	Portata Capacity		
Riferimento - Reference		Ø		mm		O	mm						kg x1	N°	kg
1430 PSO	RT 14 30 OI	140	121	30	44	21	97	14	32,5	3	194	158 x [15x9]	460	4	11
1630 PSO	RT 16 30 OI	160	140	30	44	21	125	22	24	4	261	226 x ø9	500	2	10,3
1830 PSO	RT 18 30 OI	180	160	30	44	21	135	22	34	4	261	226 x ø9	580	2	12,7
2030 PSO	RT 20 30 OI	200	180	30	44	21	145	22	44,5	4	261	226 x ø9	730	2	15