

**I Ruote a 2 cuscinetti con supporto saldato
inox con perno ingrassatore - gola 0 per**

NEWOMEGA

NEWOMEGA2

FLOOR

HEAVY



UK Wheels with welded 2 inox bearings support with lubricating pin - 0 groove

D 2-inox Stahl Drucklager Räder mit Fettpressestift - 0 Nut

F Roues avec support soudé à deux roulements inox avec pivot graisseur - gorge 0

E Ruedas con soporte soldado a 2 cuscinetto con pernio lubrificador - guía 0 para atornillar

RUS Колесо с двумя приваренными опорными подшипниками из нержавеющей стали и смазочным устройством оси паз 0

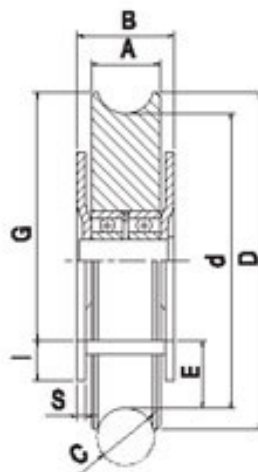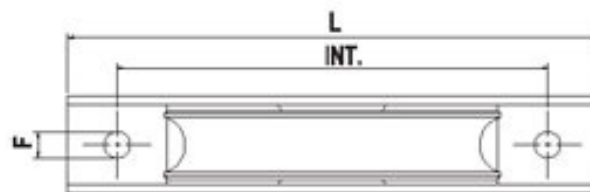

Articolo - Article	D	d	A	B	C	G	I	E	S	L	Int. x F	Portata Capacity			
Riferimento - Reference	Ø		mm		0				mm			x1	N°		
1630 PS01 RI 16 30 01	160	140	30	44	21	125	22	24	3,5	261	226 x ø9	420	2	10	