

I

Ruote in C45 a 2 cuscinetti con supporto - gola U

UK

Wheels with 2 bearings support - U groove

D

2-Drucklager Räder - U Nut

F



Route avec support à 2 roulements - gorge U

E

Ruedas con soporte formado por 2 rodamientos - guía U para atornillar

RUS

Колесо с двумя опорными подшипниками паз U

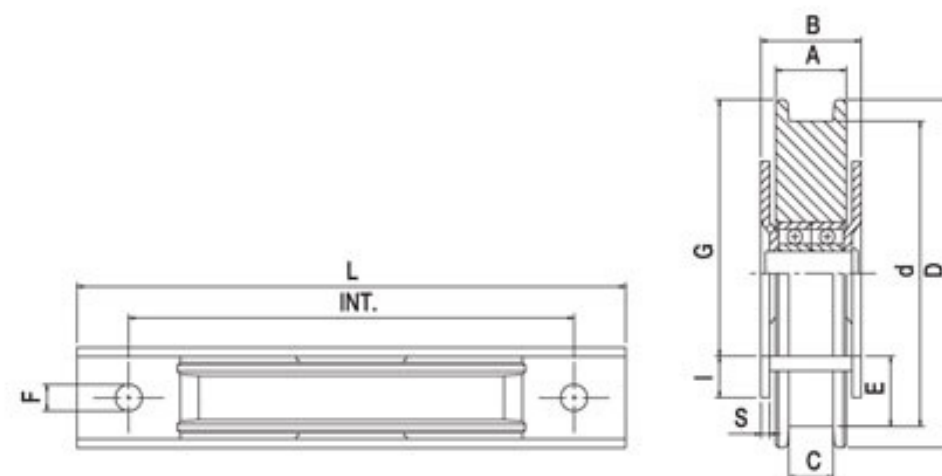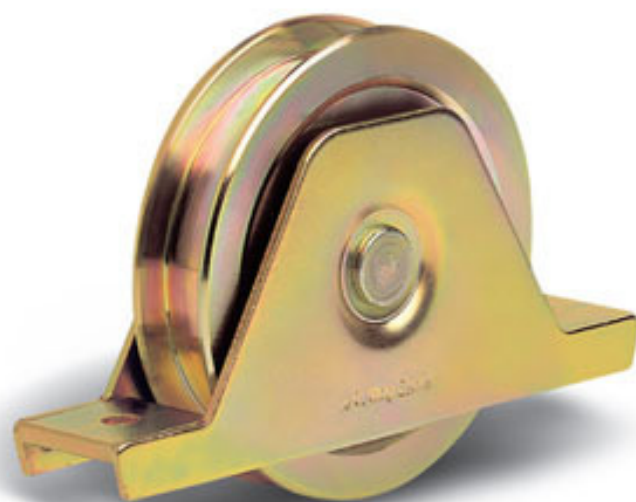

Articolo - Article		D	d	A	B	C	G	I	E	S	L	Int. x F	Portata Capacity		
Riferimento - Reference		Ø		mm		U	mm						⚙ x1	N°	⚙
822 PSU	RT 80 22 US	80	65	24	34	7	58	12	13,5	3	140	117 x ø9	280	12	12,7
922 PSU	RT 90 22 US	90	75	24	34	7	63	12	18,5	3	140	117 x ø9	300	12	14,5
1022 PSU	RT 10 22 US	100	85	24	34	7	68	12	23,5	3	140	117 x ø9	340	10	14,1
1224 PSU	RT 12 24 US	120	102	24	38	17	88	14	22	3	185	150 x ø9	430	6	12,9
1227 PSU	RT 12 27 US	120	102	26	38	20	88	14	22	3	185	150 x ø9	430	6	13,5