

I

Ruote in C45 a 2 cuscinetti con supporto - gola 0

UK

Wheels with 2 bearings support - 0 groove

D

2-Drucklager Räder - 0 Nut

F



Route avec support à 2 roulements - gorge 0

E

Ruedas con soporte formado por 2 rodamientos - guía 0 para atornillar

RUS

Колесо с двумя опорными подшипниками паз 0

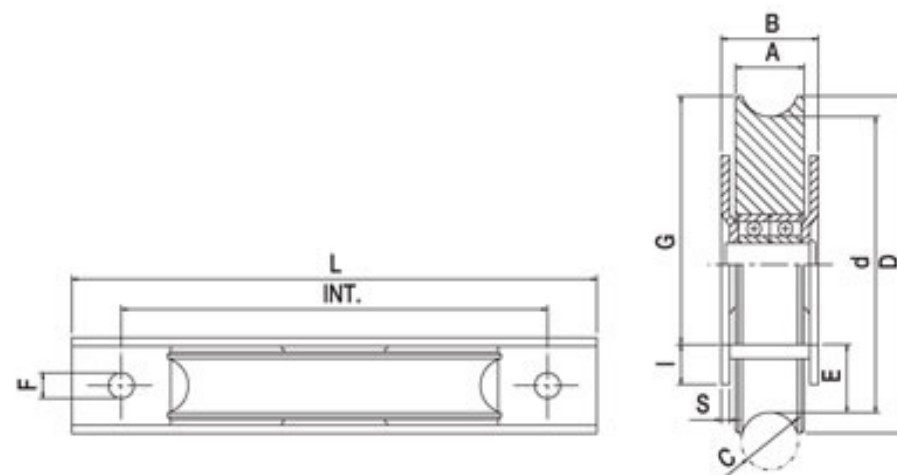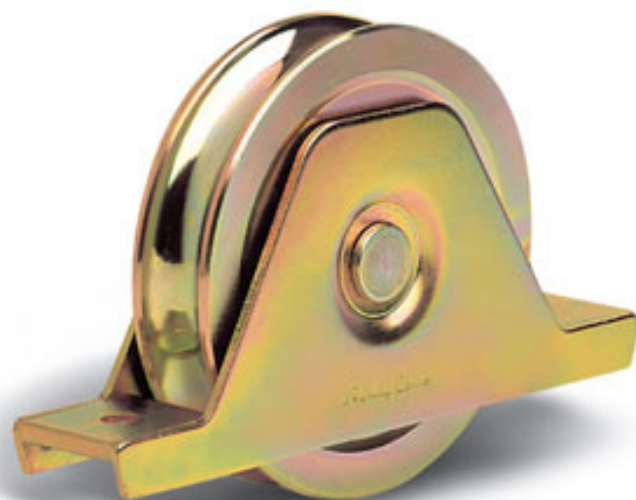

Compatibile con

NEWOMEGA

NEWOMEGA2

FLOOR

HEAVY

IBBI

SISTEMA

Articolo - Article		D	d	A	B	C	G	I	E	S	L	Int. x F	Portata Capacity		
Riferimento - Reference		Ø		mm		0	mm						🔧 x1	N°	🔧
826 PSO	RT 80 26 OS	80	60	26	34	21	58	12	11	3	140	117 x ø9	280	12	11,2
926 PSO	RT 90 26 OS	90	70	26	34	21	63	12	16	3	140	117 x ø9	300	12	13,6
1026 PSO	RT 10 26 OS	100	80	26	34	21	68	12	21	3	140	117 x ø9	340	10	13,6
1227 PSO	RT 12 27 OS	120	100	26	38	21	88	14	21	3	185	150 x ø9	430	6	13,5