

**I Ruote a 2 cuscinetti con
supporto saldato - gola O per**

NEWOMEGA

NEWOMEGA2

FLOOR

HEAVY

UK

Wheels with welded support and two bearings - O groove

D

Laufrollen mit Stützplatten und zwei Lagern - O Nut

F



Roues à 2 roulements avec support soudé - gorge O

E

Ruedas con soporte soldado con 2 cojinetes - guía O para atornillar

RUS

Ролик с кронштейном под сварку с 2 подшипниками паз O

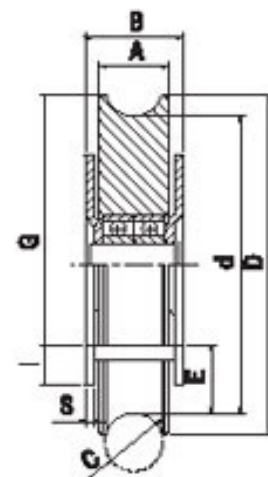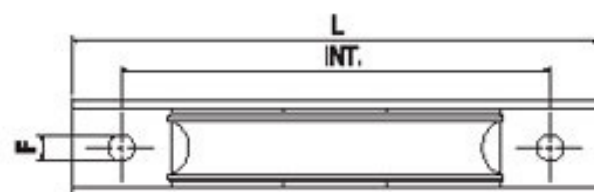

Articolo - Article		D	d	A	B	C	G	I	E	S	L	Int. x F	Portata Capacity		
Riferimento - Reference		Ø		mm		O	mm						⚙ x1	N°	⚙
1227 PSOI	RI 12 27 OS	120	100	26	38	21	88	14	21	3	185	150 x Ø9	350	6	13,3