

SUPER SILENT is the new range of cantilever carriages with MAPAR wheels (HIGH RESISTANCE NYLON MATERIAL) with exceptional strength, lightness and noise reduction.



Resistenza alla corrosione

La particolare struttura poliammidica delle ruote dei carrelli SUPER SILENT **presenta una elevata resistenza alla corrosione** rispetto ai materiali tradizionali.

Corrosion strength

The particular nylon structure of SUPER SILENT carriage wheels has a **higher corrosion strength** compared to traditional materials.



Resistenza alle temperature

Grazia alle ruote in MAPAR, i carrelli SUPER SILENT resistono a **temperature che variano da -40° a +120° C.**

Temperature strength

Thank to MAPAR wheels, SUPER SILENT carriages are resistant to a **variation of temperature from -40° to +120° C.**

Rolling Center[®]
SPECIAL ACCESSORIES FOR METAL GATES AND DOORS

New Range
SUPER X SILENT

Via Monte Bianco, 12
31040 Falzè di Trevignano (TV) Italy
Tel. +39 0423 670365 r.a.
Fax +39 0423 819253
info@rollingcenter.com
www.rollingcenter.com

Rolling Center[®]
SPECIAL ACCESSORIES FOR METAL GATES AND DOORS

NUOVA GAMMA DI
CARRELLI AUTOPORTANTI
CON **RUOTE IN MAPAR**

New range of
cantilever carriages
with **MAPAR wheels**



Quality makes the difference.



Rolling Center[®]

New Range
SUPER X SILENT

New Range
SUPER X SILENT

SUPER SILENT è la nuova gamma di carrelli autoportanti equipaggiati con **RUOTE IN MAPAR (MATERIALE POLIAMMIDICO AD ALTA RESISTENZA)** dotato di eccezionali caratteristiche di silenziosità resistenza e leggerezza.

I vantaggi della gamma SUPER SILENT



Silenziosità

Grazia alle ruote in MAPAR, i carrelli SUPER SILENT consentono un **abbattimento sonoro in fase di rotolamento** rispetto ai tradizionali carrelli.

Silence

Thanks to the MAPAR wheels, SUPER SILENT carriages **reduce rolling noise** in comparison to the traditional carriages.



Leggerezza ed efficienza


La leggerezza delle ruote in MAPAR, si traduce in minore resistenza al rotolamento e quindi meno energia per spostare il cancello.

Lightness and efficiency

The lightness of MAPAR wheels means a low rolling strength and a lower level of energy to move the gate.

Carrello “Leggero”
per cancelli autoportanti


“Light” carriage for cantilever gates

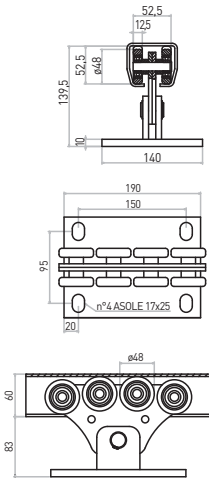

Articolo - Article	L1	Peso cancello - Gate weight	Abbinabile - Combining		
Riferimento - Reference	Max ML			N°	
SILENT L LPZ 05 060	3,5	180	GIPI 4 RL / RLZ	2	2,58
SILENT L LPZ 05 060	4	250	GIPI 4 RP / RPZ	2	2,58

Carrello “Basic”
per cancelli autoportanti


“Basic” carriage for cantilever gates

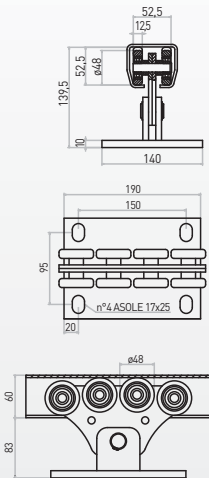

Articolo - Article	L1	Peso cancello - Gate weight	Abbinabile - Combining		
Riferimento - Reference	Max ML			N°	
SILENT P LPZ 05 080	6	450	GIPI 4 RP / RPZ	2	4,12

Carrello “Medio”
per cancelli autoportanti



“Medium” carriage for cantilever gates

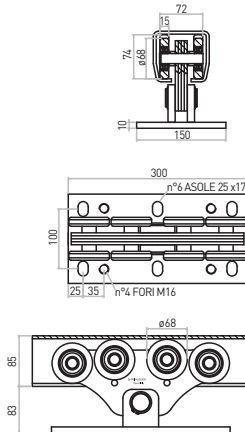

Articolo - Article	L1	Peso cancello - Gate weight	Abbinabile - Combining		
Riferimento - Reference	Max ML			N°	
SILENT G LPZ 08 080	8	600	GIPI 4 RG / GZ	2	9,20

Carrello “Magnum”
per cancelli autoportanti

“Magnum” carriage for cantilever gates

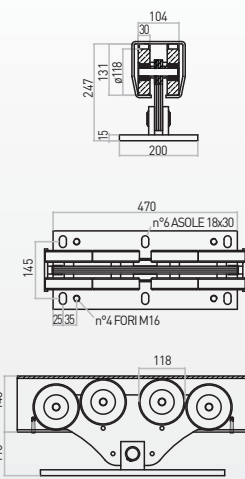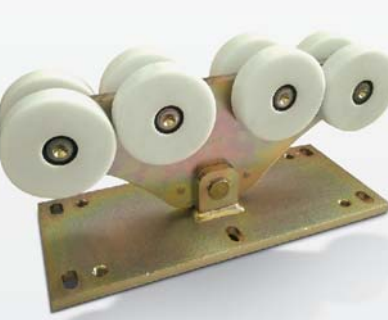

Articolo - Article	L1	Peso cancello - Gate weight	Abbinabile - Combining		
Riferimento - Reference	Max ML			N°	
SILENT M LP 012 080	16	1200	GIPI 4 RM / MG	1	25,75

New Range
SUPER X SILENT

Abbinamenti guide-carrelli
Combination tracks-carriages

Articolo - Article	Abbinabile Combining	L	H	A	B	C	S	L1	Descrizione Description	Fasci Sheafs
Riferimento - Reference		mm								ML
GIPI 4 RL 51	BG 69 59 00	69	59	22	52,5	25	3	Max 3,5ML	Grezzo da ML 5,1	91,8 438
GIPI 4 RP 6	BG 70 60 00	70	60	22	53	25	3,5	Max 4ML	Grezzo da ML 6	192 1092
GIPI 4 RLZ 51	BZ 69 59 00	69	59	22	52,5	25	3	Max 3,5ML	Zincato da ML 5,1	91,8 438
GIPI 4 RPZ 6	BZ 70 60 00	70	60	22	53	25	3,5	Max 4ML	Zincato da ML 6	192 1092
GIPI 4 RP 3	BG 70 60 03	70	60	22	53	25	3,5	Max 6 ML	Grezzo da ML 3	96 545
GIPI 4 RP 6	BG 70 60 00	70	60	22	53	25	3,5		Grezzo da ML 6	192 1092
GIPI 4 RPZ 3	BZ 70 60 03	70	60	22	53	25	3,5		Zincato da ML 3	96 545
GIPI 4 RPZ 6	BZ 70 60 00	70	60	22	53	25	3,5		Zincato da ML 6	192 1092



Articolo - Article	Abbinabile Combining	L	H	A	B	C	S	L1	Descrizione Description	Fasci Sheafs
Riferimento - Reference		mm								ML
GIPI 4 RG 3	BG 94 87 03	94	85	33	73	30	5	Max 8 ML	Grezzo da ML 3	60 714
GIPI 4 RG 6	BG 94 87 00	94	85	33	73	30	5		Grezzo da ML 6	120 1428
GIPI 4 RGZ 3	BZ 94 87 03	94	85	33	73	30	5		Zincato da ML 3	96 545
GIPI 4 RGZ 6	BZ 94 87 00	94	85	33	73	30	5		Zincato da ML 6	120 1428
GIPI 4 RM 3	BG 13 14 03	136	143	38	104	55	6	Max 16 ML	Grezzo da ML 3	45 1020
GIPI 4 RM 6	BG 13 14 06	136	143	38	104	55	6		Grezzo da ML 6	90 2034
GIPI 4 RMZ 3	BZ 13 14 03	136	143	38	104	55	6		Zincato da ML 3	45 1020
GIPI 4 RMZ 6	BZ 13 14 06	136	143	38	104	55	6		Zincato da ML 6	90 2034

