
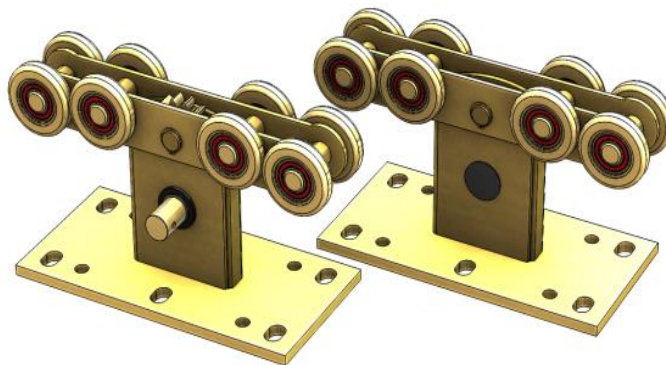


Technical Specification

Ref.Nestor: HEK791

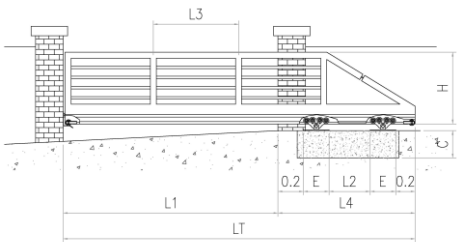

Codice ROLLING CENTER SpA:	KAPMOTGT																																																																																						
Additional code :	KITMOTOG																																																																																						
Description :	Cantilever gate kit carriage 8 wheels D. 70																																																																																						
Finish :	Galvanized yellow– thickness 13.2µm																																																																																						
Dimensions :	Base/Plate 300x150 – H 203																																																																																						
Material :	Wheels ø70x15 C45 Base, /Plate, pins and washers S235JR Body S355JR Bearing 6203 17x40x12 100Cr6																																																																																						
Accessories :	RT0415PS - /Motor shaft -M4 Z15 RT0417PS - /Motor shaft -M4 Z17 RT0418PS - /Motor shaft -M4 Z18																																																																																						
						<table><tr><th>L1</th><th>L2</th><th>L4</th><th>L5</th><th>LT</th><th>E</th><th>A</th><th>B</th><th>C</th><th>GUIDA ABBINATA</th><th>PESO MAX CANCELLO</th></tr><tr><th>mt</th><th>mt</th><th>mt</th><th>mt</th><th>mt</th><th>mt</th><th>mt</th><th>mt</th><th>mt</th><th>Kg</th></tr><tr><td>4,0</td><td>1,20</td><td>2,2</td><td>0,2</td><td>6,2</td><td>0,3</td><td>2,5</td><td>0,6</td><td>0,5</td><td>GIPI5RG/Z</td><td>600</td></tr><tr><td>5,0</td><td>1,50</td><td>2,5</td><td>0,2</td><td>7,5</td><td>0,3</td><td>2,8</td><td>0,6</td><td>0,5</td><td>GIPI5RG/Z</td><td>600</td></tr><tr><td>6,0</td><td>1,80</td><td>2,8</td><td>0,2</td><td>8,8</td><td>0,3</td><td>3,2</td><td>0,6</td><td>0,5</td><td>GIPI5RG/Z</td><td>600</td></tr><tr><td>7,0</td><td>2,10</td><td>3,1</td><td>0,2</td><td>10,1</td><td>0,3</td><td>3,7</td><td>0,6</td><td>0,5</td><td>GIPI5RG/Z</td><td>600</td></tr><tr><td>8,0</td><td>2,40</td><td>3,4</td><td>0,2</td><td>11,4</td><td>0,3</td><td>3,7</td><td>0,6</td><td>0,5</td><td>GIPI5RG/Z</td><td>600</td></tr></table>						L1	L2	L4	L5	LT	E	A	B	C	GUIDA ABBINATA	PESO MAX CANCELLO	mt	mt	mt	mt	mt	mt	mt	mt	mt	Kg	4,0	1,20	2,2	0,2	6,2	0,3	2,5	0,6	0,5	GIPI5RG/Z	600	5,0	1,50	2,5	0,2	7,5	0,3	2,8	0,6	0,5	GIPI5RG/Z	600	6,0	1,80	2,8	0,2	8,8	0,3	3,2	0,6	0,5	GIPI5RG/Z	600	7,0	2,10	3,1	0,2	10,1	0,3	3,7	0,6	0,5	GIPI5RG/Z	600	8,0	2,40	3,4	0,2	11,4	0,3	3,7	0,6	0,5	GIPI5RG/Z	600
												L1	L2	L4	L5	LT	E	A	B	C	GUIDA ABBINATA	PESO MAX CANCELLO																																																																	
												mt	mt	mt	mt	mt	mt	mt	mt	mt	Kg																																																																		
												4,0	1,20	2,2	0,2	6,2	0,3	2,5	0,6	0,5	GIPI5RG/Z	600																																																																	
												5,0	1,50	2,5	0,2	7,5	0,3	2,8	0,6	0,5	GIPI5RG/Z	600																																																																	
												6,0	1,80	2,8	0,2	8,8	0,3	3,2	0,6	0,5	GIPI5RG/Z	600																																																																	
												7,0	2,10	3,1	0,2	10,1	0,3	3,7	0,6	0,5	GIPI5RG/Z	600																																																																	
8,0	2,40	3,4	0,2	11,4	0,3	3,7	0,6	0,5	GIPI5RG/Z	600																																																																													
Lifetime :					2 millions revolutions at normal environment conditions																																																																																		
Maintenance :					Periodical cleaning of the wheels																																																																																		
Reliability and safety :					Yes																																																																																		
Ergonomics :					Yes																																																																																		
Environment :					Particular hazardous substances (SVHC) are absent																																																																																		