


ACCESSORIES PAR535

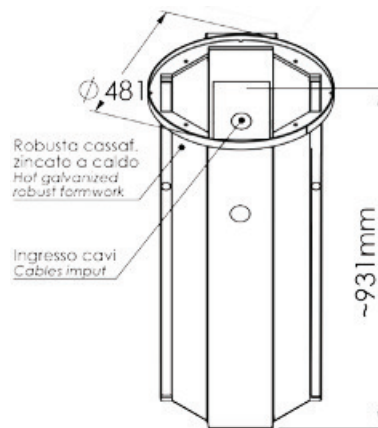

Omologata
Homologated
EN124 D400

Testa sensibile
Sensitive HEAD

LED
signaling danger

Retroreflective
adhesive stripe

Tubo zincato a
caldo e verniciato
Hot galvanized
and painted pipe

H IMPATTO
Impact height
500mm

$\phi 273\text{mm}$
S12,5

$\phi 481\text{mm}$

$\sim 700\text{mm}$

PAR540



SURCHARGE FOR SAFETY
SENSITIVE HEAD CSA300
TO PLACE AT THE ORDER

CODICE

PAR541



ELECTRICAL VALVE V230N.O. FOR
AUTOMATIC LOWERING IN POWER
FAILURE + CABLE OF 10Mt. FOR CHANGE
FROM PRIVATE TO PUBLIC LAND

CODICE

PAR542



ELECTRICAL HEATER RESISTANCE 250W
AUTO CONTROLLING 230V WITH BRACKET
AND CABLE OF 11 Mt

CODICE

PAR543



SA1 ACOUSTIC INTERMITTENT
SIGNALLER 230V IP67 WITH CABLE OF
10Mt. FOR THE SIGNALLING OF DANGER
BOLLARD IS MOVING

CODICE