

STRABUC

armoured 918


- Electro-hydraulic automation consisting of a fully retractable post made of armoured steel, fitted with a security lock barrel to provide entry protection for shops, garages, car showrooms, banks and access control



Armoured Strabuc 918
in upright position
from ground level



Armoured Strabuc 918
fully retracted flushed
with ground level

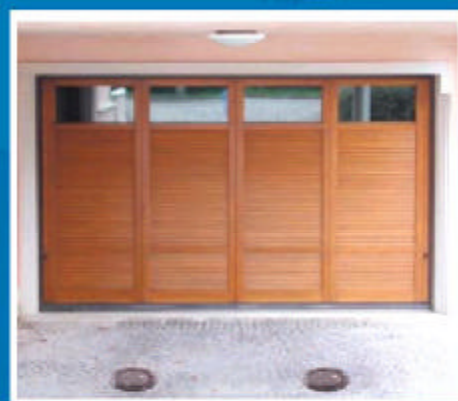

ACCESS CONTROL & CCTV

VEKTOR

DOOR & GATE AUTOMATION

STRABUC 918 ARMoured RISING BOLLARD

Technical specifications



Manual release



To release the system for hand operations, remove the respective plugs, the security lock barrel by the provided custom-made key and then release the system from the top by means of the supplied spanner.

Technical specifications and product dimensions

OIL-HYDRAULIC MOTOR PUMP


Pump type	P 10
Pump flow rate	2.75 l/min.
Mean working pressure	2 MPa (20 bars)
Max. working pressure	4 MPa (40 bars)
Working temperature	-20°C +90°C
Oil type	OIL A 15 by AGIP
Protection standards	IP 54

OIL-HYDRAULIC ACTUATOR

Travel time	10 s
Piston stroke	740 mm
Piston diameter	40 mm
Rising pushing power	250 daN
Max. pushing power	500 daN
Total weight	180 Kg
Protection standards	IP 557

ELECTRIC MOTOR

Power output	0.25 KW (0.33 HP)
Supply voltage	230 V
Frequency	50 Hz
Absorbed current	1.8 A
Absorbed power	370 W
Lamp supply	12 V, 7 W
Capacitor	12.5 µF
Motor rotation speed	2800 rev/min
Intermittent service	S3

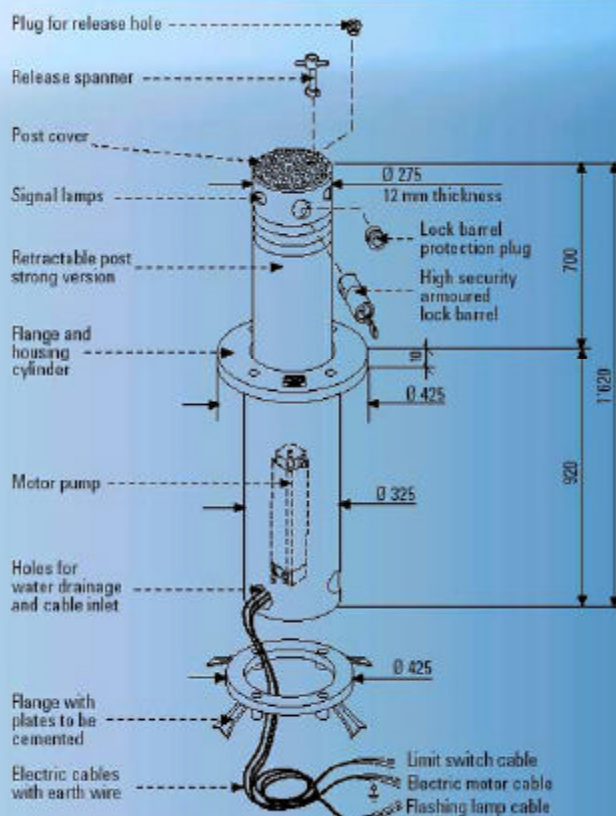

ACCESS CONTROL & CCTV

VEKTOR

DOOR & GATE AUTOMATION



EUROPEAN MARK CERTIFYING CONFORMITY TO THE ESSENTIAL REQUIREMENTS OF THE STANDARDS 98/37 EC

- DECLARATION OF CONFORMITY
- GENERAL WARNINGS
- EN 12453, EN 12445 STANDARDS
- CEI EN 60204-1 STANDARDS
- WARRANTY CERTIFICATE ON THE CUSTOMER'S REQUEST

The "CE" mark certifies that the operator conforms to the essential requirements of the European Directive art. 10 EEC 73/23, in relation to the manufacturer's declaration for the supplied items, in compliance with the body of the regulations ISO 9000-UNI EN 29000. Automation in conformity to EN 12453, EN 12445 safety standard.