



Passive infrared for indoor use

TWINBAND WL		433MHz 868MHz DUAL BAND	WIDE ANGLE COVERAGE 14m H108°	LONG RANGE COVERAGE 22m H28°	CURTAIN COVERAGE 15m V62° H5.6°	PET IMMUNE COVERAGE 17m H88°	CLASS II GENERAL INDOOR
	Wireless passive infrared detector - 433/868MHz frequency bands - ASYN@WL protocol - Volumetric protection: 29 infrared beams, 4 levels, 108° coverage, 14m maximum range - Anti-tamper protection: anti-opening/antidetachment, supervision - Lithium battery included - Environmental class II (indoor general) - ABS casing - Design by Pininfarina - White						
	TWINBAND WL/V	Item no. F102TWINBAND/V (wide angle)					
	TWINBAND WL/C	Item no. F102TWINBAND/C (long range)					
	TWINBAND WL/T	Item no. F102TWINBAND/T (curtain)					
	TWINBAND WL/PET	Item no. F102TWINBAND/PE (pet-immunity)					

TWINBAND WL - Technical and functional specifications

General features	Type	TWINBAND WL	Anti-tamper protection	Anti-opening/detachment	Micro-switch
Detection features	Infrared detector	Dual PIR element	Electrical specifications	Lithium battery	SOCL2 - 3.6V
	Infrared beams	29		Battery autonomy	> 4 years
	Infrared beams levels	4	Physical specifications	Environmental class	II
	Coverage	108°, range 14m		Protection class	IP4x-IK04
	Settings	Pulse count		Casing	ABS
Wireless specifications	Communication protocol	ASYN@WL		Dimensions (L x H x D)	68 x 118 x 51mm
	Transmitter	UHF		Weight	126g
	Frequency bands	433/868MHz			
	Modulation	OOK			

Coverage diagrams
TWINBAND WL/V

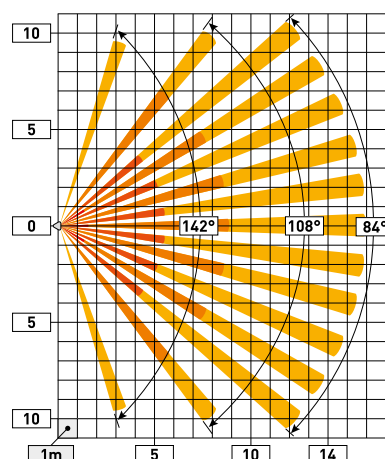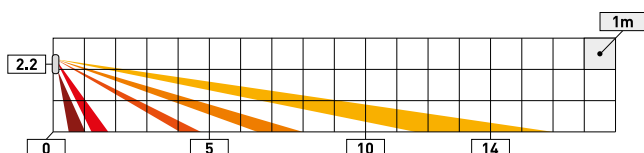

TWINBAND WL - Accessories



SNODO 2000

Swivel mounting bracket with H ±45°, V -15° orientation - Surface mounting - Anti-tamper protection: anti-opening/antidetachment - Approved for certified detectors

Item no. F102SNODO2000