

Dual technology for outdoor use




GLOBAL SPACE	       
	Infrared and microwave detector for protection of sheltered outdoor areas close to the building, gardens and terraces - High-density volumetric protection with multi-point technology: 43 infrared beams, 5 levels, 15m maximum range - Coverage adjustable with lens shutter - Programmable AND detection logic - Self test and automatic temperature compensation - Great versatility of installation thanks to a comprehensive range of accessories - Anti-tamper protection: anti-opening/antidetachment, antimasking - Environmental class III (indoor and sheltered outdoor) - ASA casing - White
	Item no. F102GLOSPACE - MW frequency 10.525GHz
	Item no. F102GLOSPACE/99 - MW frequency 9.9GHz
	Item no. F102GLOSPACE/93 - MW frequency 9.35GHz

GLOBAL SPACE - Technical and functional specifications

General features	Type	GLOBAL SPACE	Anti-tamper protection	Anti-opening/detachment	Micro-switch
Detection features	Infrared detector	3 dual PIR elements	Functions	Antimasking	Programmable
	Infrared beams	43		Self test	Automatic
	Infrared beams levels	5	Electrical specifications	Operating voltage	10V...14.5V DC
	IR programming	Pulse count Sensitivity		Stand-by consumption	30mA @ 12V DC
	Coverage adjustment	Lens shutter		Max. consumption	37mA @ 12V DC
	Temperature compensation	Automatic	Physical specifications	Environmental class	III
	Microwave frequency	10.525GHz*		Protection class	IP44-IK04
	Microwave detector	Excludable		Casing	ASA
	Coverage	84°, range 15m		Dimensions (L x H x D)	76 x 192 x 83mm
	Detection logics	4 modes AND		Weight	240g
Inputs	Inhibition of detection	Stand-by	* Also available with the frequencies 9.9GHz and 9.35GHz		

OUTDOOR

Coverage diagrams

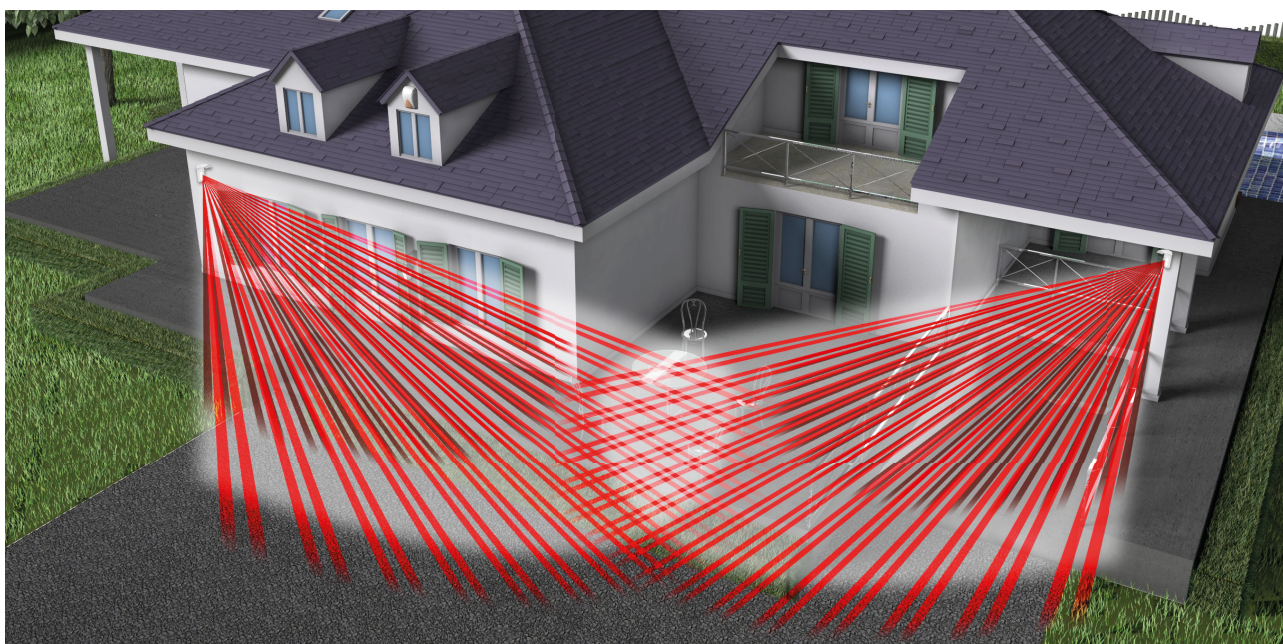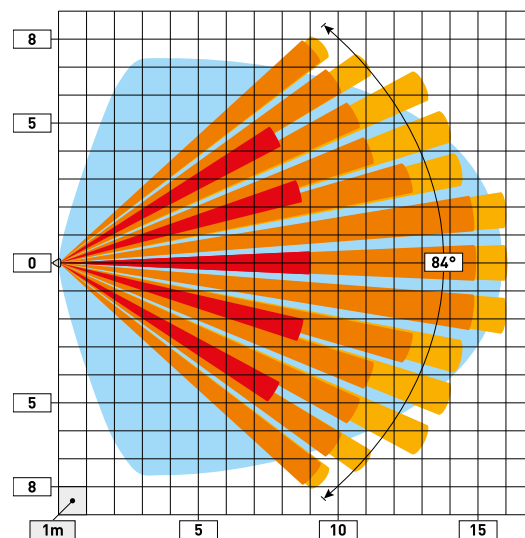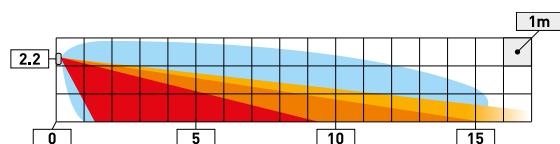

GLOBAL SPACE - Accessories

**CORNER MOUNTING BRACKET**

Corner mounting bracket for wall mounting with 22.5° or 45° angle - ASA - White

Item no. F102STAFFAGLOB

**RAIN COVER**

Rain cover for protection against bad weather and sunlight - ASA - White - Dimensions (L x H x D) 136 x 58 x 162mm

Item no. F102GLOCALOTTA

**SNODO GLOBAL SPACE**

Swivel mounting bracket with $H \pm 90^\circ$, $V \pm 10^\circ$ orientation - Surface mounting - Anti-tamper protection: antidetachment

Item no. F102SNODOGLOB