


Video integration

The EV 10-50 system can manage video integration in **three different ways**, with the TECNOVISION module, with the IP Zones software plug-in or with the Tecno Out software plug-in, each with specific characteristics:

- the **TECNOVISION** module with the Evolution app offers a simple but functional solution for integrating IP cameras
- the **IP Zones** software plug-in allows you to directly integrate generic IP devices and IP cameras with video analysis functions for alarm detection
- the **Tecno Out** plug-in integrates third-party home automation and video analysis systems

TECNOVISION	
	The TECNOVISION video integration module constitutes a simple but functional solution for integrating the EV 10-50 system with the management of up to 12 IP cameras. The module, control panel and IP cameras must be connected to the same LAN. The IP cameras are associated to the virtual zones of the control panel and can be used to either detect and release the alarms directly using the video analysis, or to validate the alarms detected by the physical zones of the system. The alarm events and video clips are recorded by the control panel and then saved in the Cloud, where they can be accessed and viewed by the Evolution app. The app also permits viewing of the live stream of one IP camera at a time. Integrated RSC® technology: remote programming and management - Surface mounting - Environmental class II (indoor general) - White ABS casing
Item no. F127TECNOVISION	

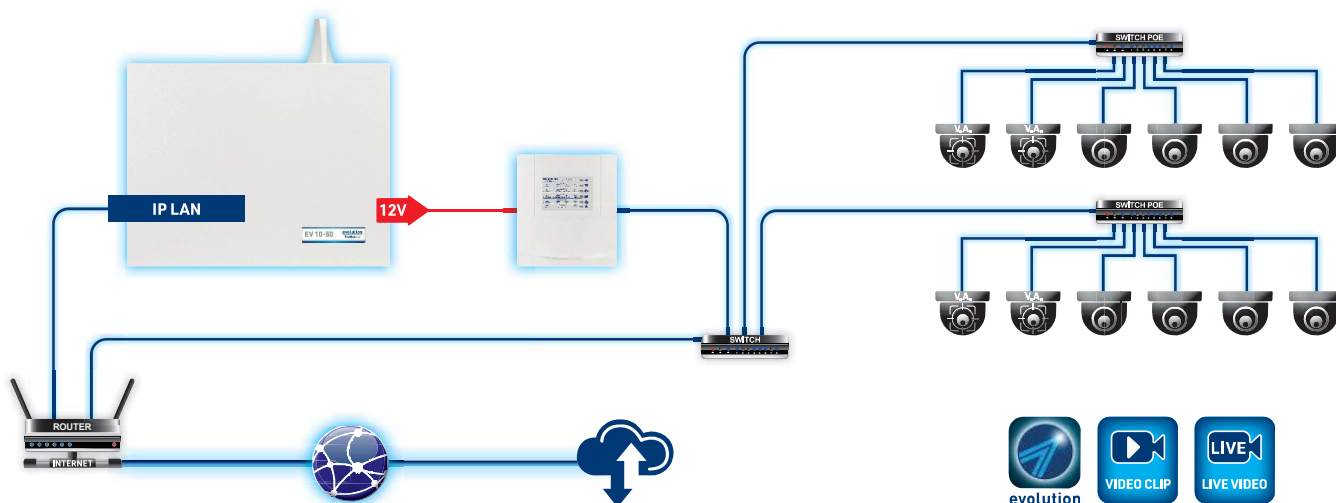

TECNOVISION - Technical and functional specifications

General features	Type	TECNOVISION	Apps	iPhone - Android - Huawei	Evolution
Network features	Communication format	IP	Electrical specifications	Rated voltage	12V DC
	Passphrase	Automatic		Operating voltage	10V...28V DC
	IP camera management protocol	RTSP		Max. consumption	Max. 200mA @ 12V DC
	IP address configuration	Manual DHCP	Physical specifications	Environmental class	II
	Cloud protocol and data encryption	TECNOTT TLS 1.2		Protection class	IP2x-1K04
Video integration	IP cameras managed	Max. 12 Onvif		Casing	ABS
	Live stream management	1 live stream		Dimensions (L x H x D)	186 x 209 x 62,5mm
	Video clip recording	On alarm		Weight	900g