




BDS468

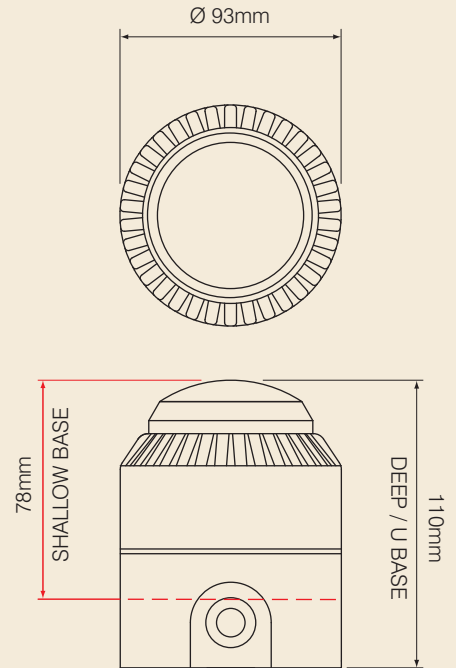

RoLP Solista

STANDARD SOUNDER WITH LED

The use of beacons to supplement audible alarms is becoming increasingly common. A combined sounder beacon allows both an audible and visual alarm to be provided but requires only a single installation point. LED beacons have a dramatically lower current consumption than that of traditional xenon beacons making them ideal for applications where sounder circuit capacity is limited.

- ULTRA LOW CURRENT – LED TECHNOLOGY
- SOUNDER & BEACON WITH A SINGLE INSTALLATION POINT
- UNOBTRUSIVE LOW PROFILE DESIGN
- STANDARD FULLEON BASE SIMPLIFIES SYSTEM UPGRADES
- LOCKABLE BASE

Specification

Voltage	9 - 28Vdc (*1)
Current	19mA (Typical Tone 3)
Sound Output	101dB(A) (Typical Tone 3)
Tones	32
Light Output	> 0.5Cd
Flash Rate	1Hz
Volume Control	20dB
Monitoring	Reverse polarity
Temperature	- 10°C to + 55°C
Protection	IP54 (s)* IP65 (d)*
Construction	ABS, PC lens
Weight	0.3Kg
Colours	Red or white
Flash Colour	Red

(*1) 110 to 230Vac with powered base

(s)* Shallow Base

(d)* Deep / U Base

