




24V/
230V

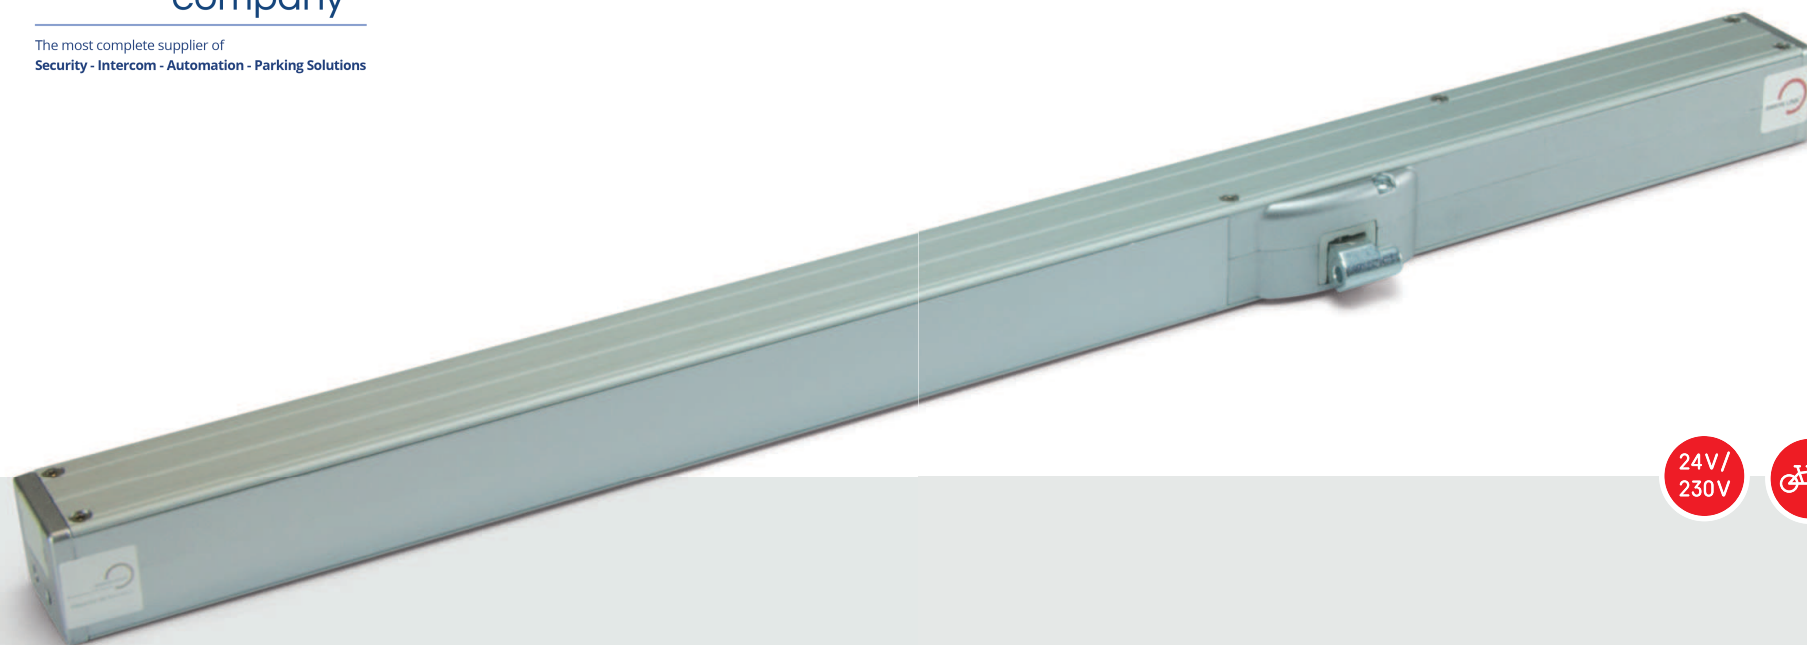


Kettenantrieb EA-K-30

Chain Actuator EA-K-30

Ref Nestor: PUS782

With the chain actuator EA-K-30 the product family around the technologically high quality actuator systems EA-K will be complemented by a compact and powerful version. It is the smaller brother of EA-K-50.






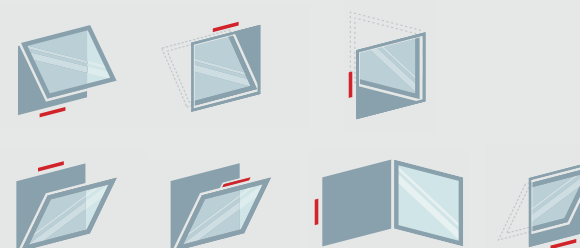


Ref Nestor: PUS782

Vorteile / Leistungseigenschaften

Advantages / performance characteristics

- Anschlussleitung mit Stecker
Connecting cable with plug
- Anschluss beidseitig möglich – DA Variante
Connection possible on both sides - DA version
- Geringe Gehäuseabmessungen
Small casing dimensions

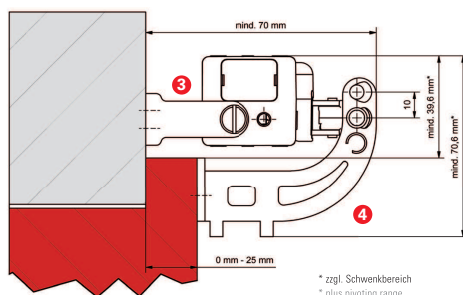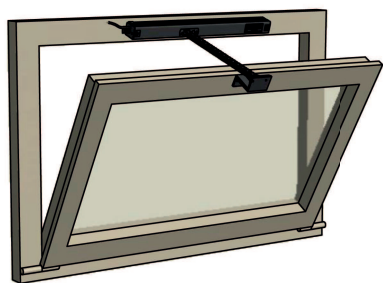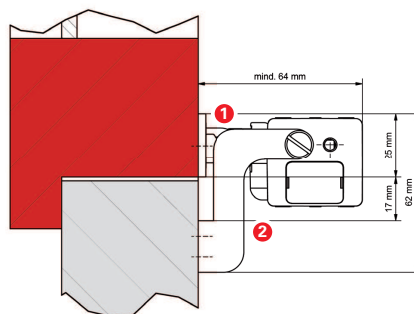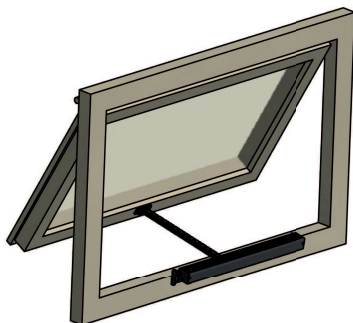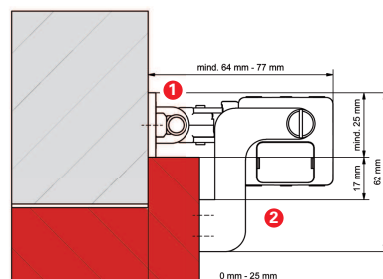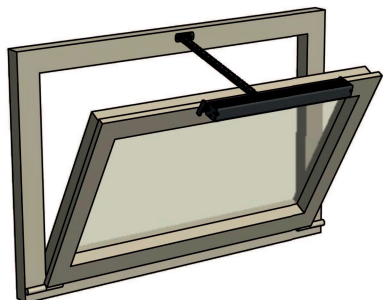

Technische Daten


Technical Data

Abmessungen Dimensions





Strom » 24 VDC	1.0 A	Current » 24 VDC
Strom » 230 VAC	0.23 A	Current » 230 VAC
Hublänge	300 – 1200 mm	Stroke
Kraft	300 N	Force
IP Schutz	IP 32	Protection class
Geschwindigkeit	10 mm/s	Speed
Temperaturbereich	-5° - +75°C	Temperature range
Gewicht	≈ 1,5 kg	Weight
Oberfläche	Alu E6/EV1	Surface

Konsolen Brackets

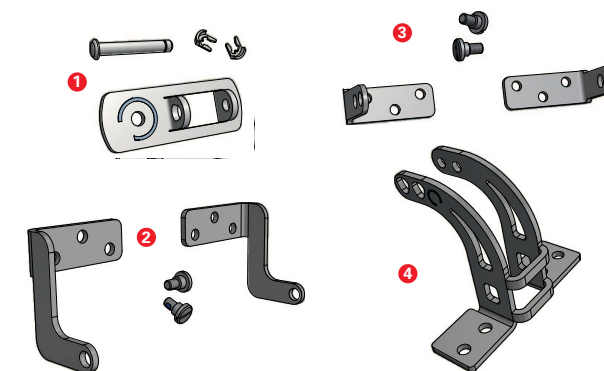

1. K-K50-OK Obere Konsole
Top bracket
2. K-K30-A Nach außen und mitlaufend
Outward opening and rotating
3. K-K30-K Montage für nach innen
Inward opening at frame
4. K-K30-AKI Montage für nach innen
Inward opening at sash

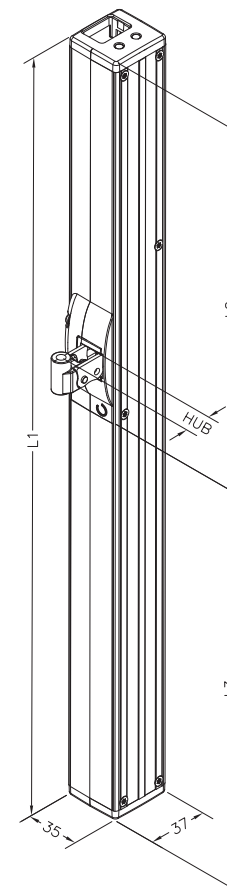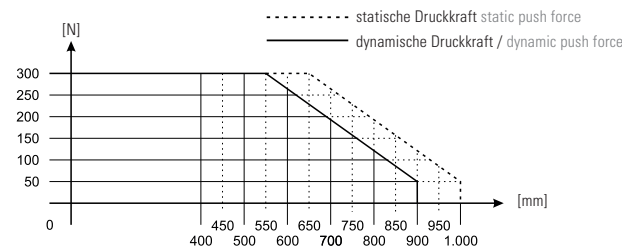

- Länge L1:
Length L1:
 - EA230-K-30/300(-S) = 408 mm
 - EA-K-30/400-T(-DA) = 467 mm
 - EA-K-30/600-T(-DA) = 564 mm
 - EA-K-30/800-T(-DA) = 667 mm
 - EA-K-30/1000-T(-DA) = 764 mm
 - EA-K-30/1200-T(-DA) = 867 mm
- EA230-K30 Gehäuse +60 mm
EA230-K30 Housing +60 mm