

Range:
150-200 m with antenna

TRANSMITTERS

K-SLIM series



ROLLING CODE TECHNOLOGY GREEN LED

P-250K-SLIMRP

Two-channel transmitter, rolling code technology, 433,92 MHz.

K-250K-SLIMRPX20

Pack of 20 two-channel transmitters with rolling code technology, 433.92 MHz.

DIP-SWITCH TECHNOLOGY RED LED

P-250K-SLIM

Two-channel transmitter, dipswitch technology, 433,92 MHz.

K-250K-SLIMX20


Pack of 20 two-channel transmitters with dipswitch technology, 433.92 MHz.

SELF LEARNING TECHNOLOGY ORANGE LED

P-250K-SLIMC

Two-channel transmitter, self-learning technology, 433,92 MHz.

TECHNICAL DRAWINGS

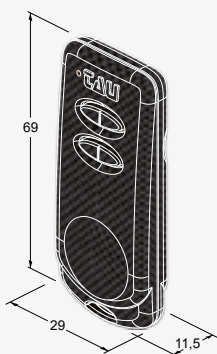

FEATURES:

- frequency: 433,92 MHz
- range: 150 - 200 m in open air (the effective range depends on terrain and possible radio frequency interferences)
- a transmitter can be programmed into any number of self-learning radio receivers, thus avoiding the use of different transmitters

ROLLING CODE FEATURES

- 281.000 billion code combinations
- rolling code technology: every time the transmitter sends a code, it generates a new code using an encoder. An algorithm identifies and validates only the signal of the transmitters encoded by the radio receiver

PROS

- virtually impossible to duplicate
- the code can be personalized thanks to the TAUPROG programmer
- ideal for multi-user systems

DIP SWITCH FEATURES

- 1024 code combinations
- not compatible with the newest control units generation

PROS

- easy programming
- the code can be easily changed by setting the switches inside the transmitter
- dipswitch transmitters can be programmed both in dipswitch and self-learning radio receivers

SELF LEARNING FEATURES

- 1024 code combinations
- self-learning technology
- not compatible with the newest control units generation

PROS

- quick and easy programming, without opening the transmitter's shell
- these transmitters can be programmed both in dipswitch and self-learning radio receivers
- ideal for multi-user systems