



Nestor ref. ACC294

# VF380

## Multi-function Face Identification Terminal

VF380 is a face identification time & attendance and access control terminal, which can connect with third party electric lock, door sensor, and exit button etc. With the latest face identification algorithm and streamlined technology, it can hold 1.200 face templates without dividing into groups. Communicating via Ethernet, and USB (host), it ensures a smooth connection and data transfer. Amazing verification speed and intuitive operation process make it popular. Elaborately designed and finely processed, it matches your slap-up office perfectly.

---

### Feature


- Elegant ergonomic design; Easy installation.
- Ethernet, and USB (host) communication.
- Professional ZKTeco face identification algorithm.
- 1.200 face capacity and 10,000 ID Card Capacity.
- Optional Mifare card module.
- Infra-red optical system enables user-identification in a wide range of light environments.

# Specifications



|                       |                                                                                                                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Display               | 3-inch Touch Screen                                                                                                                                                                             |
| Face Capacity         | 1,200 (1:N)                                                                                                                                                                                     |
| ID Card Capacity      | 10,000                                                                                                                                                                                          |
| Logs Capacity         | 100,000                                                                                                                                                                                         |
| Communication         | Ethernet , USB (host)                                                                                                                                                                           |
| Standard Functions    | ID card, Automatic Status Switch, Self-Service Query, Work Code, T9 Input, 9 Digit User ID, DST, Scheduled-bell and Short Message, 3rd party electric lock, door sensor, and exit button, alarm |
| Optional Function     | Mifare Card, Wi-Fi                                                                                                                                                                              |
| Power Supply          | 12V/1.5A                                                                                                                                                                                        |
| Verification Speed    | ≤1S                                                                                                                                                                                             |
| Operating Temperature | 0-45 °C                                                                                                                                                                                         |
| Operating Humidity    | 20%-80%                                                                                                                                                                                         |
| Dimensions            | 104.7 × 160 × 36 mm (L × H × D)                                                                                                                                                                 |

## Configuration

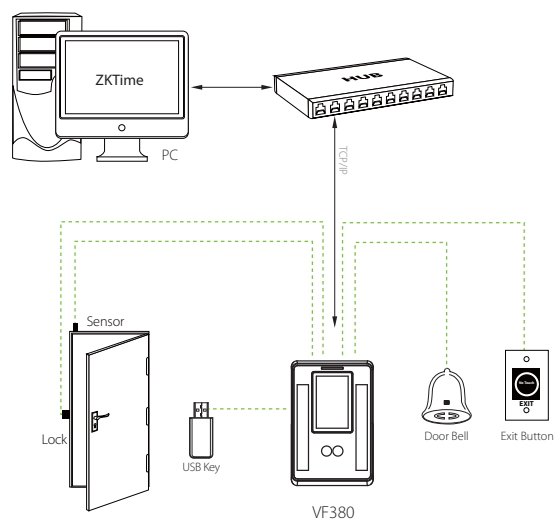

## What's in the Box

