


OET-213H-BTS1

Thermische scanner met gezichtsherkenning & digitale lichaamstemperatuurmodule

De thermische scanner OET-213H-BTS1 detecteert contactloos elke vorm van hoge lichaamstemperatuur zoals b.v. koorts. De BTS1 kan dan ook ingezet worden in het opsporen van Corona symptomen en andere infecties.

Deze terminal is echter veel meer dan een tijdelijke oplossing. Het kan namelijk ook dienst doen als een elegant toegangscontrolesysteem voor bezoekers en medewerkers.

De toepassingsgebieden zijn dan ook zeer ruim: openbare gebouwen, scholen, rusthuizen, ziekenhuizen, kantoren, fabrieken, ...

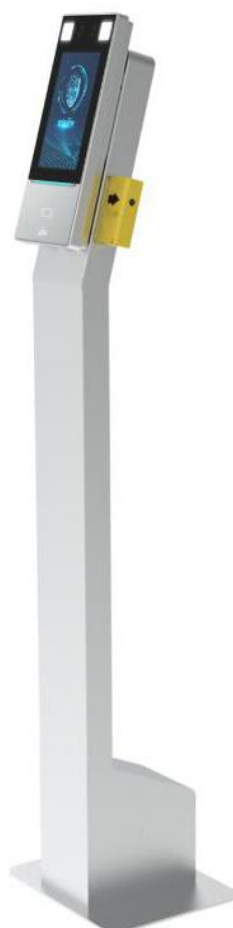

Kan zowel tegen de wand bevestigd worden als op een vloerstandaard (optioneel)

Kan volledig zelfstandig functioneren of als onderdeel van een toegangscontrolesysteem



Temperatuurmeting via de pols

Referenties

Model	
OET-213H-BTS1	Thermische scanner met gezichtsherkenning
EP-S31-W-NB	Vloerstandaard

Product Features BTS1

- Support non-contact detection of wrist temperature, support warning people with abnormal body temperature
- Support body temperature detection and personnel information binding, which can quickly confirm personnel information and do body temperature detection
- Support configure temperature detection threshold value, and personnel access authority can be configured through temperature detection threshold value
- Non-contact wrist temperature detection module, measurement range is between **30°C to 45°C**, measurement accuracy can reach **0.1°C**, measurement deviation is less than or equal to 0.3°C, and measurement distance is between 1cm to 3cm
- Deep learning algorithm model based on UNV independent intellectual property rights, face recognition accuracy rate > 99%, false rate < 1%
- Built-in deep learning dedicated chip, supports local offline recognition, 10,000 face capacity, face whitelist (1:N)
- Fastest recognition time 0.2 seconds, various model merge mode are used to reduce false rate and increase pass rate
- WDR, 2MP (1080P) low illumination wide-angle camera and F1.6 large aperture lens for capturing high quality image with various complex lighting scenes
- Support anti-spoofing detection based on deep learning algorithm, effective against fraud such as photo and video
- Support face metering and human metering for fast adapting to ambient light
- Suggested height for face recognition: between 0.8m and 2.2m, face recognition distance: 0.2m to 2.9m
- Support screen sleep mode, keep the minimum brightness to prevent glare at night
- Support add up to 6 photos of the base library for a single person
- Support video capture, support **ONVIF protocol**
- **Support face, card, password and QR code authentication to control door open**
- Two-way audio with indoor monitor
- Built-in 4G EMMC front end storage, stable and reliable, up to 8,000 events capacity (with images)
- Support tamper protection, support door open timeout and time exceed alarm function to keep door opening during fire alarm active

Product Specification

Features Parameter	Description
Operation System	Linux
Face Recognition Accuracy Rate	>99%
Face Recognition Time	200ms
Face Capacity	10,000
Card Capacity	100,000
Storage Capacity	4GB
Event Capacity	8,000 (with images)
Measurement Range	30°C - 45°C
Measurement Accuracy	0.1°C
Measurement Deviation	≤0.3°C
Measurement Distance	1cm-3cm
Authentication Mode	Face Whitelist: (1:N)
	Card:(1:N)
	Face +Body temperature
	Mask Detection
Door Opening Method	Face, Password, QR code, Card
Communication Mode	10/100Mbps adaptive network port
Card Type	Mifare 1 Card
User Management	Support user library addition, deletion, update
Record Management	Support local recording and real-time upload
Interface	LAN×1, Wiegand Input×1, Wiegand Output×1, RS485×1, Alarm Input×2, Alarm Output×1, USB2.0×1, Lock×1, Door Contact ×1, Exit Button×1
Power Supply	Input 12V±25% DC
Screen	Touch Screen, Size:7 inch, Resolution: 600×1024
Camera	Dual Lens, 2MP, 1080P
Supplement Light	LED soft light and infrared light
Dimensions (L×W×H)	For terminal : 134.0mm×33.0mm×305.0mm
Working Environment	For terminal: -20°C-65°C, Relative Humidity<95% (non-condensing) For module: 15°C-30°C
Protection Level	Both terminal and module: IP 54
Application Situation	Indoor, No wind