


Accessories

Power Supplies and Universal Box



PS2

Power supply with backup battery space.

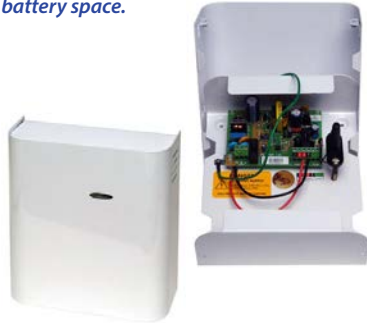

Main input power:	220V AC+/-10%, 50Hz
Output Voltage:	12.8 V to 13.8 VDC, Nominal 13.5 VDC
Output Current:	Average 1,5A, Maximum 2A
Output Ripple:	< 6m V at nominal input voltage
Electrical protection:	Against high voltages and surges
Monitoring:	Green LED indicates output
Battery specification:	12V, 7.2 Ah sealed lead acid type battery
Fuse protection:	2A for mains 2A for battery polarity reversal

Ref.	PS2	PS2-E
Features	Power supply in metal housing	Electronic of the PS2

UH4-PS2

Universal Housing with 2 x 2 Amp PSU with backup battery space.



Main input power:	220V AC+/-15%, 50Hz
Output Voltage:	12.8 V to 13.8 VDC, Nominal 13.5 VDC
Output Current:	Average 1,5A, Maximum 2A
Monitoring:	Green LED indicates output
Battery specification:	12V, 7.2 Ah sealed lead acid type battery
Fuse protection:	1A for mains, 2A for 12VDC output
IP factor:	IP30

Ref.	UH4-PS2	UH2-PS2
Features	Universal housing with 2 power supplies of 2 Amp	Universal housing with 1 power supply of 2 Amp

UH2-PS2

Universal Housing with 1 x 2 Amp PSU with backup battery space.

