

CAM960-961

IPC-F625/645/665 SERIES

Box-type IP Camera



Model

DH-IPC-F625P	DH-IPC-F625N	DH-IPC-F625P-W	DH-IPC-F625N-W
DH-IPC-F645P	DH-IPC-F645N	DH-IPC-F645P-W	DH-IPC-F645N-W
DH-IPC-F665P	DH-IPC-F665N	DH-IPC-F665P-W	DH-IPC-F665N-W




NOTE:

F6x5P with PAL format, F6x5N with NTSC format. -W support wireless LAN. F625 with 420 TV lines, F645 with 480 TV lines, F665 with 540 TV lines.

Features

- TI DaVinci Series DSP
- H.264
- SONY CCD
- 0.1Lux@F1.2
- 1 video out
- Multi stream, ACF
- RS485 control
- Reset function
- Alarm I/O
- SD card
- PoE
- JPEG snapshot

Dimensions(mm)

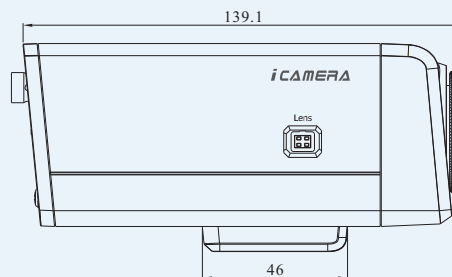



Specifications

Model	DH-IPC-F625P/N(-W)	DH-IPC-F645P/N(-W)	DH-IPC-F665P/N(-W)
Processor	TI DaVinci Series DSP		
Operating System	Embedded LINUX		
Resource	Simultaneous remote monitoring, local recording and remote control		
User Interface	WEB, DSS, PSS		
System Info	HDD info, BPS, Log, Soft version, online user		
Image Sensor	1/3-inch SONY Super HAD CCD		
Video Format	PAL(625Line, 50f/s), NTSC(525Line, 60f/s) selectable		
Total Pixels	PAL:500(H)×528(V) NTSC:510(H)×492(V)	PAL:752(H)×528(V) NTSC:768(H)×494(V)	PAL:795(H)×596(V) NTSC:811(H)×508(V)
Resolution	Color: 420TVL B/W: 420TVL	Color: 480TVL B/W: 600TVL	Color: 540TVL B/W: 600TVL
Day/Night	Yes		
Auto Iris	Yes		
Lens	Selectable		
Lens Mount	CS		
Mini. Illumination	Color : 0.1Lux/F1.2 B/W : 0.01Lux/F1.2		
Signal Noise Ratio	>50dB		
Gamma Correction	0.45		
Gain Control	Auto		
White Balance	Auto		
Electronic Shutter	Auto/Manual, 1/50~1/10000		
Video Compression	H.264/MPEG4/JPEG		
Video Resolution	D1/HD1/CIF/QCIF/QCIF		
Video FPS	PAL:25fps, NTSC:30fps, selectable		
Video BPS	32K~4Mbps selectable		
Video Output	1-ch BNC(1.0VP-P, 75ohm),		
Audio Compression	G.711/AMR		
Audio BPS	64Kbps/32Kbps/10.2Kbps		
Audio Input	1-ch 3.5mm JACK MIC IN		
Audio Output	1-ch 3.5mm JACK SPEAK OUT		
Alarm	1-ch IN/1-ch OUT		
Wired Network	10/100 Ethernet, RJ45		
Wireless Network	802.11b/802.11g(-W)		
Synchronization	Yes		
Local Record	SD card		
RS485	Yes		
PoE	Yes		
Power Supply	DC 12V		
Power Consumption	<5W		
Operating Environment	-10℃~+55℃, 10%~90%		
Dimension	122mmx68mmx55mm		
Weight	650g		
Mount	Multiple choice		



Nestor company N.V. Tel. 00-32-(0)9-380.40.20
 E3-Laan 93 Fax 00-32-(0)9-380.40.25
 B-9800 Deinze info@nestorcompany.be
 Belgium www.nestorcompany.be