

CAM980-981

IPC-F725 SERIES

2.0Megapixel IP Camera



Model

DH-IPC-F725P

DH-IPC-F725P-W

DH-IPC-F725N




DH-IPC-F725N-W

NOTE:

F725P with PAL format, F725N with NTSC format. -W support wireless LAN.

Features

- TI DaVinci Series DSP
- H.264/MPEG4
- 2.0M CMOS
- 0.1Lux@F1.2
- ePTZ control
- RS485 control
- Reset function
- Alarm I/O
- SD card
- PoE
- JPEG snapshot

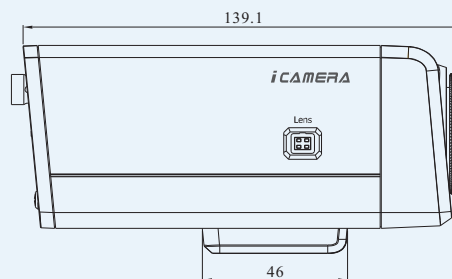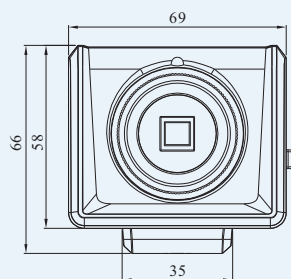

Specifications



Model	DH-IPC-F725P/N(-W)
Processor	TI DaVinci Series DSP
Operating System	Embedded LINUX
Resource	Simultaneous remote monitoring, local recording and remote control
User Interface	WEB, DSS, PSS
System Info	HDD info, BPS, Log, Soft version, online user
Image Sensor	1/3-inch CMOS
Video Format	PAL/NTSC selectable
Total Pixels	1600(H)*1200(V)
Day/Night	Yes
Auto Iris	N/A
Lens	Selectable
Lens Mount	CS
Mini. Illumination	0.1LUX/F1.2
Signal Noise Ratio	>50dB
Gain Control	Auto
White Balance	Auto
Electronic Shutter	Auto/Manual, 1/50~1/10000
Video Compression	H.264/MPEG4/JPEG
Video Resolution	2.0M(1600×1200)/1.3M(1280×960)/720P/D1/HD1/VGA/CIF/QCIF/QVGA/QCIF
Video FPS	25fps(1280×720), 12.5fp(1280×960), 12.5fps(1600×1200)
Video BPS	32K~8Mbps selectable
Video Output	1-ch BNC(1.0VP-P, 75ohm),
Audio Compression	G.711/PCM/AMR
Audio BPS	64Kbps/32Kbps/10.2Kbps
Audio Input	1-ch 3.5mm JACK MIC IN
Audio Output	1-ch 3.5mm JACK SPEAK OUT
Alarm	2-ch IN/1-ch OUT
Wired Network	10/100 Ethernet, RJ45
Wireless Network	802.11b/802.11g(-W)
Synchronization	Yes
Local Record	SD card
RS485	Yes
PoE	Yes
Power Supply	DC 12V
Power Consumption	<5W
Operating Environment	-10℃~+55℃, 10%~90%
Dimension	122mmx68mmx55mm
Weight	650g
Mount	Multiple choice



Nestor company N.V. Tel. 00-32-(0)9-380.40.20
 E3-Laan 93 Fax 00-32-(0)9-380.40.25
 B-9800 Deinze info@nestorcompany.be
 Belgium www.nestorcompany.be