

DH-IPC-HF3211

2.0 Megapixel Full HD Network Camera



DH-IPC-HF3211P: 2.0 Megapixel CCD, 25fps at 1080P, PoE

DH-IPC-HF3211N: 2.0 Megapixel CCD, 30fps at 1080P, PoE

Features

- > 2/3" 2.0 Megapixel KODAK progressive scan CCD image sensor
- > High-performance TI DaVinci series DSP
- > H.264 video compression and JPEG image capture
- > 25/30fps at 1080P resolution
- > Dual encoding streams supported
- > Support ICR true Day/Night
- > Support CS Auto Iris lens
- > Support Alarm I/O, RS485 and RS232 interface
- > Max 32GB Hot-swappable SD card for local storage
- > Support DC12V/AC24V dual power supply, PoE
- > Built-in Web server, NVR, CMS(PSS/DSS) & DMSS

DH-IPC-HF3211


Specifications

Model	DH-IPC-HF3211P		DH-IPC-HF3211N
General			
Processor	TI DaVinci Series DSP		
Operating System	Embedded LINUX		
Resource	Simultaneous remote monitoring, local recording and remote control		
User Interface	WEB, CMS(DSS/ PSS), DMSS, NVR		
Camera			
Image Sensor	2/3″ 2.0 Megapixel KODAK progressive scan CCD		
Effective Pixels	1928 (H) x 1084 (V)		
Min. Illumination	0.1LUX/F1.2(Color), 0.01LUX/F1.2(B/W)		
Electronic Shutter	Manual / Auto, 1/50~1/10'000s		
S/N Ratio	>64dB		
Gain Control	Auto/ Manual		
White Balance	Auto / Manual		
Day/Night	ICR		
Lens Mount	CS		
Auto Iris	Support		
Video			
Video Compression	H.264/JPEG		
Image Resolution	1080P (1920 x 1080) /D1(704 x 576)	1080P (1920 x 1080) /D1(704 x 480)	
Encoding Speed	Main Stream: 1080P (1~25fps), Extra Stream: D1(1~25fps)	Main Stream: 1080P (1~30fps), Extra Stream: D1(1~30fps)	
Bit Rate	160K~8Mbps		
Snapshot	Fastest 1fps JPEG capture		
Video Format	PAL		
Analogue Video Output	1 channel BNC(1.0Vp-p, 75Ω)		
Audio			
Audio Compression	G.711a/G.711u/PCM		
Bit Rate	64kbps/32kbps/10.2kbps		
Input	1 channel 3.5mm Jack Mic in		
Output	1 channel 3.5mm Jack Speak out		
Network			
Ethernet	RJ-45 (10/100Base-T)		
Wi-Fi	802.11b/802.11g, -W model supported		
Network Functions	HTTP, TCP/IP, ICMP, RTSP, RTP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, , Alarm Server		
Remote Operation	Monitor, PTZ control, Playback, System setting, File download, Log information, Maintenance & Upgrade		
Auxiliary Interface			
SD Card	Max 32GB, local storage		
RS232	PC communication		

DH-IPC-HF3211

RS485	PTZ control
Alarm	2 Input / 1 Output
Environmental	
Power Supply	AC24V/DC12V, PoE
Power Consumption	<10W
Working Temperature	-15℃~+70℃
Dimension	174.5mm×100.5mm×78.5mm
Weight	2.5Kg

Dimensions (mm)

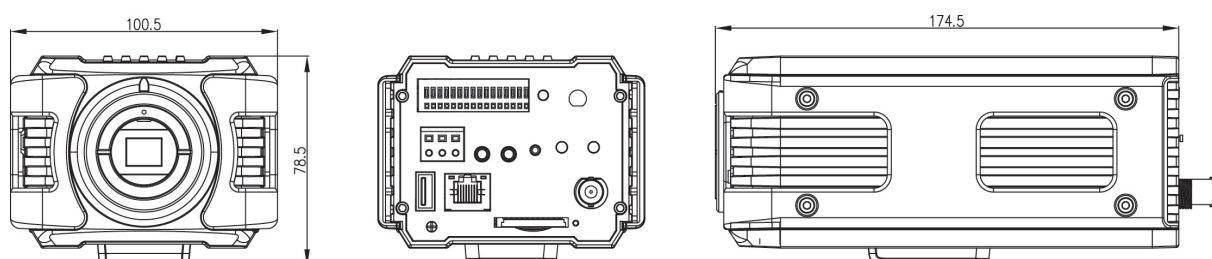

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2011 Dahua Technology Co., Ltd.