

HIGH-DEFINITION IMAGE EXACT & CLEAR VISION

VIVID IMAGE WITH DAY & NIGHT




XDi-V

LCV5500

High Resolution Vandal Proof
Dome Camera

700 TVL (B/W), ICR Day & Night, WDR




FEATURES

- 6mm (1/3 Type) Super HAD CCD II
- 2.8 ~ 11mm Vari-focal Lens, F1.2
- 520K / 610K Pixels (NTSC / PAL)
- 650TVL @ Color / 700TVL @ B/W
- Color : 0.0001 Lux @ Sens-up x512, F1.2
- B/W : 0.00001 Lux @ Sens-up x512, F1.2
- 2D + 3D DNR
- ICR Day & Night / WDR
- 14 Privacy Zone Masking
- Motion Detection (8 Zones)
- Coaxial Communication, IP66
- DC 12V / AC 24V

LCV5500

High Resolution Vandal Proof Dome Camera

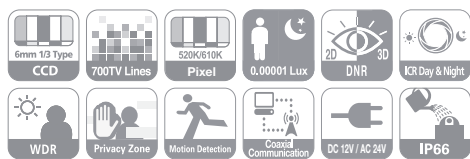


SPECIFICATIONS

Model Name		LCV5500	
		LCV5500-BN	LCV5500-BP
Video	Signal System	NTSC	PAL
	Imaging Sensor	6mm (1/3 Type) Super HAD CCD II	
	Total / Effective Pixels No.	520K / 480K	610K / 570K
	Horizontal Resolution	650TVL @ Color / 700TVL @ B/W	
	Image Signal Processor	XDI-V	
	Lens Type	2.8 ~ 11mm Vari-focal Lens, F1.2	
	Minimum Illumination (30IRE)	Color : 0.2 Lux @ Sens-up Off, F1.2 0.003 Lux @ Sens-up Auto, F1.2 0.0001 Lux @ Sens-up x512, F1.2 B/W : 0.02 Lux @ Sens-up Off, F1.2 0.0003 Lux @ Sens-up Auto, F1.2 0.00001 Lux @ Sens-up x512, F1.2	
	Day & Night	ICR (AUTO / DAY / NIGHT)	
	IRIS Control	DC	
	Sync. System	Internal / Line Lock	
	Scanning Frequency (H/V)	15.734KHz / 59.94Hz	15.625KHz / 50Hz
	S/N Ratio	50dB	
	Video Output Signal	1Vp-p Composite (75Ω)	
Operational	Backlight Compensation	BLC / HSBLC / WDR / Off	
	DNR	2D + 3D - DNR	
	Exposure	ALC / ELC	
	Auto Gain Control	Off / Low / Middle / High	
	Electronic Shutter Speed	1/60 ~ 1/120,000	1/50 ~ 1/120,000
	Digital Zoom	x16	
	Sens-up	Off / Auto (x2, x3, x4, ...x512) / Manual (x2, x3, x4, ...x512)	
	White Balance	Auto / ATW (1,700°K ~ 11,000°K) / One Push / Manual	
	Privacy Zone Masking	14 Mask Zones	
	Motion Detection	8 Zones	
	Digital Effect	Off / V-Flip / Mirror / Rotate	
	OSD Language	English, Chinese, Korean, Japanese, French, Italian, Spanish, Portuguese, Dutch, German, Polish, Russian, Turkish, Arabic, Hebrew	
	Communication	Coaxial Communication	
General	Power Source	DC 12V / AC 24V	
	Power Consumption	2.4W	
	Input Current	190mA	
	Operating Temperature / Humidity	-10°C ~ 50°C / 0% ~ 80%RH	
	Storage Temperature / Humidity	-20°C ~ 60°C / 0% ~ 85%RH	
	Certifications	FCC, CE, UL, KCC	
	Ingress Protection	IP66	
	Dimension (ø x H)mm	ø140 X 122mm	
	Weight (kg)	0.71	

* Exact products and specifications shown may vary by geographic region and are subject to change without notice. Actual products may differ from the images appearing in the catalog.

DIMENSION (Unit : mm)

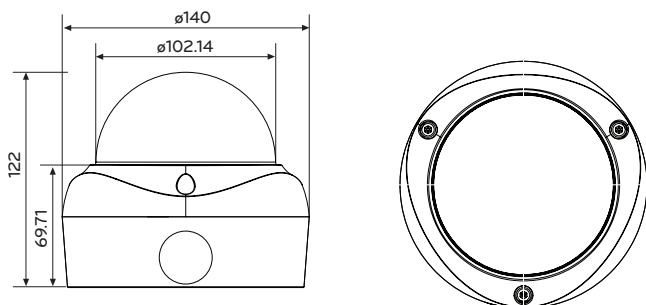

Home Entertainment Company
Security Overseas Marketing Team
LG Twin Towers, 20 Yeouido-dong, Yeongdeungpo-gu, Seoul 150-721, Korea
Phone : +82-2-3777-5184

The eco-friendly label is attached to those products which have passed LG Electronics' rigorous environmental criteria that evaluate 6 hazardous materials (lead, mercury, cadmium, etc.)

