

**Deliver
Exceptional
Vision in Every
Moment**



LND3220R

LG1322

Capture the details at
high sensitivity even in darkness

LND3220R/LNU3220R



LNU3220R

LG1222

LND3220R / LNU3220R


2Megapixel Network Dome&Bullet Camera

SPECIFICATIONS


Features		LND3220R	LNU3220R
Camera	Image Sensor	6.4 mm (1/2.8 Type) CMOS	6.4 mm (1/2.8 Type) CMOS
	Mount Type / Lens	4 mm F2.0	4 mm F2.0
	Min. Illumination	Color : 0.07 lux @F2.0 (1/30 sec, 50 IRE) B/W : 0 lux @ IR LED on	Color : 0.07 lux @F2.0 (1/30 sec, 50 IRE) B/W : 0 lux @ IR LED on
	Day / Night	ICR (Auto / Day / Night)	ICR (Auto / Day / Night)
	WDR	Digital (Dynamic Range Enhancer)	Digital (Dynamic Range Enhancer)
	IR LEDs	14	24
	IR Distance	20 m	30 m
	Focus	Manual	Manual
Video/Audio	Image Enhancement	Mirror / V-Flip / BLC / DRE / AGC / Brightness / White balance / DNR / Color saturation / Sharpness / Privacy mask	Mirror / V-Flip / BLC / DRE / AGC / Brightness / White balance / DNR / Color saturation / Sharpness / Privacy mask
	Video Compression	H.264 (High profile supported) / MJPEG	H.264 (High profile supported) / MJPEG
	Max. Resolution	1920 x 1080 / 1280 x 720 / D1 (704 x 480) / CIF (352 x 240)	1920 x 1080 / 1280 x 720 / D1 (704 x 480) / CIF (352 x 240)
	Max. Frame Rate	30 fps @ 1920 x 1080	30 fps @ 1920 x 1080
	Multi-Streaming	Yes (Up to 7)	Yes (Up to 7)
	ROI (Region of Interest)	Crop (Up to 4)	Crop (Up to 4)
Event	Video Analytics	Motion detection, Tampering detection	Motion detection, Tampering detection
	Event Trigger	Video analytics	Video analytics
	Event Notification	Email, FTP	Email, FTP
	Pre/Post Event Buffering	5 / 5 seconds	5 / 5 seconds
Network	Ethernet	RJ-45 10/100BASE-T	RJ-45 10/100BASE-T
	Security	Password protection, HTTPS (SSL, TLS), IP filtering, IEEE 802.1X	Password protection, HTTPS (SSL, TLS), IP filtering, IEEE 802.1X
	Open Protocol	ONVIF 2.2 Profile S, PSIA 1.1	ONVIF 2.2 Profile S, PSIA 1.1
	Protocol	IPv4/6 - TCP, UDP, HTTP, HTTPS, RTP, RTSP, DHCP, ICMP, QoS, UPnP IPv4 - FTP, SMTP, NTP, ARP, SNMPv1/v2c/v3, DDNS(LG)	IPv4/6 - TCP, UDP, HTTP, HTTPS, RTP, RTSP, DHCP, ICMP, QoS, UPnP IPv4 - FTP, SMTP, NTP, ARP, SNMPv1/v2c/v3, DDNS(LG)
	Web Viewer	Microsoft Internet Explorer 7.0 ~ 9.0 (32bit)	Microsoft Internet Explorer 7.0 ~ 9.0 (32bit)
	Video Management Software	LG Ipolute VMS Suite, Mobile App (iPhone, iPad, Android)	LG Ipolute VMS Suite, Mobile App (iPhone, iPad, Android)
	Connections	Up to 10	Up to 10
General	Power Source	DC12V / PoE	DC12V / PoE
	Max. Power Consumption	5.9 W	6.9 W
	Max. Input Current	450 mA (DC12V) / 140 mA (PoE)	510 mA (DC12V) / 170 mA (PoE)
	Operating Temperature / Humidity	-10°C ~ 55°C / 0% ~ 80%RH	-10°C ~ 55°C / 0% ~ 80%RH
	Standard Approvals	UL, FCC, CE, KC, Police (China)	UL, FCC, CE, KC, Police (China)
	Color / Material	White / Plastic	White / Plastic
	Ingress Protection	-	IP66
	3-Axis	Manual	-
	Dimension	ø140 x 122 mm	89 x 83 x 280 mm
	Weight	479 g	427 g

• Exact products and specifications shown may vary by geographic region and are subject to change without notice. Actual products may differ from the images appearing in the catalog.

DIMENSION (Unit : mm)

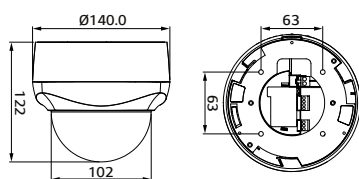

[LND3220R_Side / Rear]

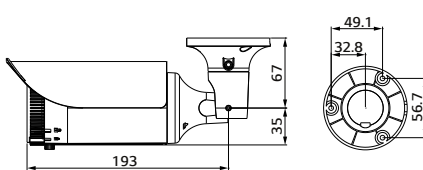

[LNU3220R_Side / Rear]