

More Than Real Over Darkness

Capture the details with 60FPS Full HD,
Smart features and x3 Compact zoom
event without light



LNU7210R

Smart IR

Smart IR function enhances the camera IR performance for better image quality



Conventional

LG

Defog

Defog function supports the clear image in any weather condition such as fog, rain and smog



Conventional

LG

Full HD 60FPS

Full HD 60FPS stream allows vivid streaming to users



30FPS

60FPS

x3 Compact Zoom

More detail image, fine focus and easy installation are on remote x3 compact zoom function




x1

x3

Audio Detection

User can detect abnormal sound like baby cries or a loud noise

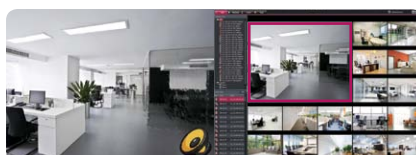

Face Detection

By face detection, it is possible to detect people in prohibited areas



LNU7210R

2 Megapixel full HD 60fps Network Bullet Camera




SPECIFICATIONS

Features		LNU7210R
Camera	Imaging Sensor	6.4 mm (1/2.8 Type) CMOS
	Lens Type	3-9 mm F1.2 (x3 Zoom)
	Max. Resolution	1920 x 1080
	Min. Illumination	Color : 0.05 lux @ F1.2 (1/30 sec, 50 IRE) B/W : 0 lux @ IR LED on
	Day / Night	ICR (Auto / Day / Night)
	WDR	Max. 108 dB
	IR LEDs	32
	IR Distance	30 m
	Focus	Auto
	Image Enhancement	Backlight compensation / 2D+3D DNR / Defog / Exposure control / AGC / White balance / Privacy masking / Sharpness / EIS / Pivot / Smart IR
Video/Audio	Video Analytics	Motion detection, Tampering alarm, Face detection
	Video Compression	H.264 (High profile supported) / MJPEG
	Max. Frame Rate	60 fps @ 1920 x 1080
	Multi-Streaming	Dual streaming
	Smart codec	Yes (2 per stream)
	ROI (Region of Interest)	Up to 2 (Smart codec)
	Streaming on Motion	Yes
	Text Overlay	-
	Audio Compression	G.711, G.726
	Two-way Audio	Yes
Event	Audio Detection	Yes
	Event Trigger	Video analytics, Audio detection, Alarm input
	Event Notification	Relay Out, Email, FTP
Interface	Pre/Post Event Buffering	5 / 5 seconds
	Video In / Out	1 BNC Out
	Audio In / Out	1 In / 1 Out
	Alarm In / Out	1 In / 1 Out
	SD Slot	Micro SD
Network	Ethernet	RJ-45 10/100BASE-T
	Security	Password protection, HTTPS (SSL, TLS), IP filtering, IEEE 802.1X
	Open Protocol	ONVIF 2.2 Profile S, PSIA 1.1
	Protocol	IPv4/6 - TCP/IP, UDP, HTTP, HTTPS, RTP, RTSP, DHCP, ICMP, QoS IPv4 - FTP, SMTP, NTP, ARP, SNMPv1/v2c/v3, DDNS(LG)
	Web Viewer	Microsoft Internet Explorer 7.0 ~ 9.0 (32bit)
	Video Management Software	LG Ipsolute VMS Suite, Mobile App (iPhone, iPad, Android)
	Connections	Up to 20
	Power Source	PoE / AC24V / DC12V
General	Power Consumption	10.6 W
	Operating Temperature / Humidity	-10°C ~ 50°C / 0% ~ 80%RH
	Standard Approvals	UL, FCC, CE, KCC, Police (China)
	Color / Material	White / Aluminum
	Ingress Protection	IK10, IP66
	Dimension (Ø x H)	92.1 x 89.8 x 338.6 mm
	Weight	1.54 kg (1.7 kg with Sunshield)

* Exact products and specifications shown may vary by geographic region and are subject to change without notice. Actual products may differ from the images appearing in the catalog.

DIMENSION (Unit : mm)

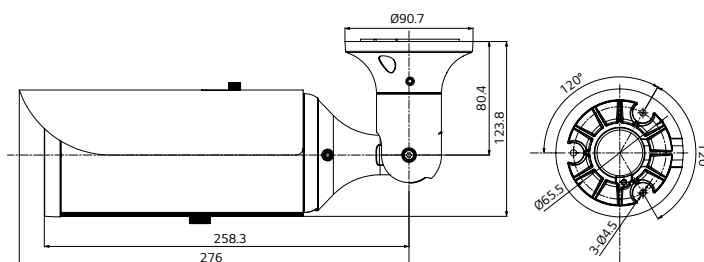

Home Entertainment Company
Security Overseas Marketing Team
LG Twin Towers, 20 Yeouido-dong, Yeongdeungpo-gu, Seoul 150-721, Korea
Phone : +82-2-3777-5184

The eco-friendly label is attached to those products which have passed LG Electronics' rigorous environmental criteria that evaluate 6 hazardous materials (lead, mercury, cadmium, etc.)



<http://www.lgcommercial.com/security-en>