

LG ipsolute

CAPTURE EVERY MOMENT WITH FULL HD RESOLUTION

Full HD x12 IP PTZ Dome Camera.

ONVIF **XDI-II**



LW9422



x12 OPTICAL ZOOM(5.3 ~ 63.6mm)

Close monitoring is possible through the powerful x12 optical zoom.



PANNING AND TILTING

The PTZ camera, it quickly and thoroughly monitors the preset areas by using high-speed panning and tilting functions.



Max. 500°/sec HIGH SPEED PANNING & TILTING



REAL-TIME STREAMING @ 1,080P

LG IP products can transmit Full HD high resolution images at up to 30fps in real time. This allows users to monitor seamless Full HD security images.



Non Real-Time Streaming

Real-Time Streaming



VANDAL PROOF / IP66

A strong and durable cover protects the camera from external harms, especially from impacts due to any drastic change in temperature or humidity.




Vandal Proof

IP66



ULTRA COMPACT / ULTRA LIGHT

Apparatus can be easily installed due to its size and weight that have been reduced by 20%.

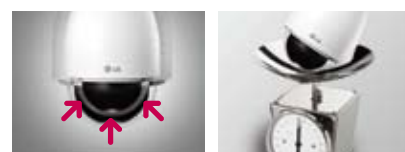

Ultra Compact

Ultra Light



LW9422

1,080p x12 IP PTZ Dome Camera



SPECIFICATIONS

Model	LW9422
General	Type
Camera	Image Sensor
	Lens
	Resolution
	Min. Illumination
	ICR Day / Night WDR
	Image Enhancement
PTZ	Optical Zoom
	Panning Range & Speed
	Tilting Range & Speed
	Auto Panning
	Preset/ID Group Touring
	Pattern Auto Tracking
Video/Audio	Video Compression Frame Rate
	Multi-Streaming Open Protocol
	Audio Compression 2-Way Audio
Event	Motion Detection Event Notification
	Pre Event Buffering
Interface	Video In/Out
	Audio In/Out Alarm In/Out
	RS-485 SD Slot
Network	Ethernet
	Security IP
	Protocol
	Web Viewer
	Video Management Software (VMS)
	Connections
Power	Power Source
	Power Consumption
Environmental	Operating Temperature / Humidity
	Standard Approvals
Mechanical	Color / Material
	Ingress Protection
	Dimension (Ø x H)
	Weight


* Exact products and specifications shown may vary by geographic region and are subject to change without notice. Actual products may differ from the images appearing in the catalog.

FEATURES

- 6.49 mm (1/2.8 Type) CMOS Sensor
- 1,920 x 1,080 Resolution
- x12 Optical Zoom and x12 Digital Zoom
- 30 fps @ 1,920 x 1,080 Resolution
- Min. Illumination : Color : 1 Lux
B/W : 0.1 Lux (AGC High, Sens-up Off)
- H.264 / MJPEG Dual Codec
- Dual Streaming Enabled
- Panning Range & Speed : 0°~360°, Max. 500°/Sec
- Tilting Range & Speed : 0°~180°, Max. 500°/Sec
- Wide Dynamic Range
- ICR Day & Night
- Vandal Proof / IP66
- LG Ipsolute VMS Suite
Mobile Application (iPhone, Android)
- PoE+ / AC 24V



DIMENSION (Unit : mm)

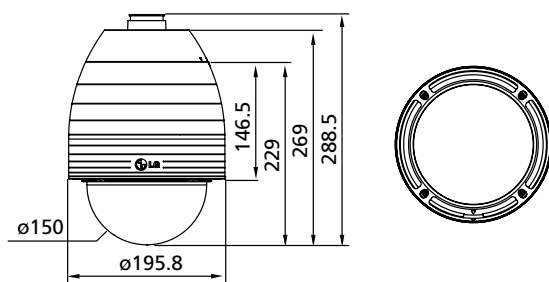

BRACKETS



LG Twin Towers, 20 Yeouido-dong, Yeongdeungpo-gu, Seoul 150-721, Korea
Phone : +82-2-3777-5184 Fax : +82-2-3777-5185

The eco-friendly label is attached to those products which have passed LG Electronics' rigorous environmental criteria that evaluate 6 hazardous materials (lead, mercury, cadmium, etc.)

