

LG ipsolute

CAPTURE EVERY MOMENT WITH FULL HD RESOLUTION


Full HD x20 IP PTZ Dome Camera.

ONVIF



x20 OPTICAL ZOOM(4.7 ~ 94mm)

Close monitoring is possible through the powerful x20 optical zoom.

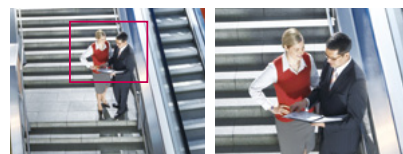

PANNING AND TILTING

The PTZ camera, it quickly and thoroughly monitors the preset areas by using high-speed panning and tilting functions.




Max. 360°/sec HIGH SPEED PANNING & TILTING



REAL-TIME STREAMING @ 1,080P

LG IP products can transmit Full HD high resolution images at up to 30fps in real time. This allows users to monitor seamless Full HD security images.

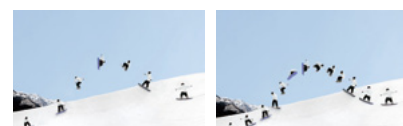

Non Real-Time Streaming

Real-Time Streaming



VANDAL PROOF / IP66

A strong and durable cover protects the camera from external harms, especially from impacts due to any drastic change in temperature or humidity.




Vandal Proof

IP66



ULTRA COMPACT / ULTRA LIGHT

Apparatus that is 20% smaller than before it can be easily installed due to the size and weight.

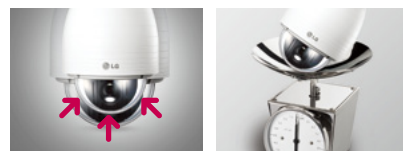

Ultra Compact

Ultra Light



LW9424

1,080p x20 IP PTZ Dome Camera



SPECIFICATIONS

Model	LW9424
General	Type
Camera	Image Sensor
	Lens
	Resolution
	Min. Illumination
	ICR Day / Night WDR
	Image Enhancement
PTZ	Optical Zoom
	Panning Range & Speed
	Tilting Range & Speed
	Auto Panning
	Preset/ID Group Touring
	Pattern Auto Tracking
Video/Audio	Video Compression Frame Rate
	Multi-Streaming Open Protocol
	Audio Compression 2-Way Audio
Event	Motion Detection Event Notification
	Pre Event Buffering
Interface	Video In/Out
	Audio In/Out Alarm In/Out
	RS-485 SD Slot
Network	Ethernet
	Security IP
	Protocol
	Web Viewer
	Video Management Software (VMS)
	Connections
Power	Power Source
	Power Consumption
Environmental	Operating Temperature / Humidity
	Standard Approvals
Mechanical	Color / Material
	Ingress Protection
	Dimension (Ø x H)
	Weight


* Exact products and specifications shown may vary by geographic region and are subject to change without notice. Actual products may differ from the images appearing in the catalog.

FEATURES

- 1/3 Type Solid State Progressive Scan CMOS
- 1,920 x 1,080 Resolution
- x20 Optical Zoom and x12 Digital Zoom
- 30 fps @ 1,920 x 1,080 Resolution
- Min. Illumination
Color : 0.5 Lux @ Sens-up Auto,
B/W : 0.0005 Lux @ Snes-up Auto
- H.264 / MJPEG Dual Codec
- Dual Streaming Enabled
- Panning Range & Speed : 0°~360°, Max. 360°/Sec
- Tilting Range & Speed : 0°~90°(Mecha-flip), Max. 360°/Sec
- Wide Dynamic Range
- ICR Day & Night
- Vandal Proof / IP66
- LG Ipsolute VMS Suite
Mobile Application (iPhone, Android)
- DC 12V / AC 24V



DIMENSION (Unit : mm)

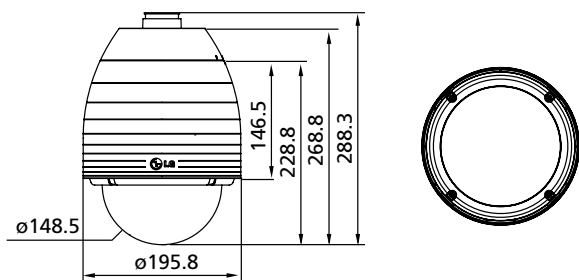

BRACKETS



LG Twin Towers, 20 Yeouido-dong, Yeongdeungpo-gu, Seoul 150-721, Korea
Phone : +82-2-3777-5184 Fax : +82-2-3777-5185

The eco-friendly label is attached to those products which have passed LG Electronics' rigorous environmental criteria that evaluate 6 hazardous materials (lead, mercury, cadmium, etc.)

