

THE BEST COMBINATION OF ANALOG AND IP

HYBRID DIGITAL VIDEO RECORDER
16CH LE5016D/4016D, 8CH LE5008D/4008D




LE5016D/4016D




TWO IP INPUT CHANNELS

Two IP input channels enable video recording from IP cameras as well as analog cameras, thereby giving users more flexibility in recording and rearranging their existing security system.

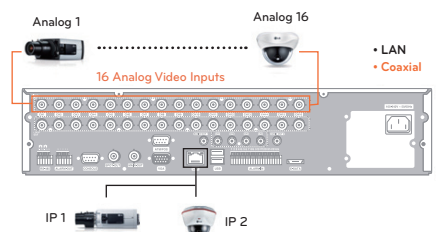

H.264 CODEC

H.264 enables the transmission of higher-quality images at the same rate as does MPEG4. Also H.264 has a higher compression ratio than MPEG4, and can thus reduce its bandwidth and storage usage.

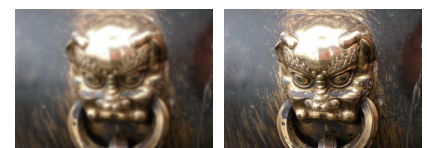


MPEG4

H.264



REAL-TIME RECORDING

Images are recorded in real-time, thus providing the best monitoring and playback environment.

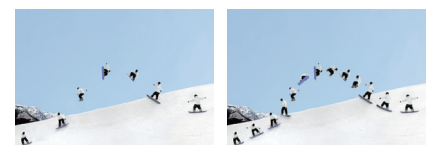


Non Real-Time

Real-Time



2-WAY AUDIO

Two-way communication lets the DVR operator engage in audio communication with a manager in a remote area, thus making remote management possible.

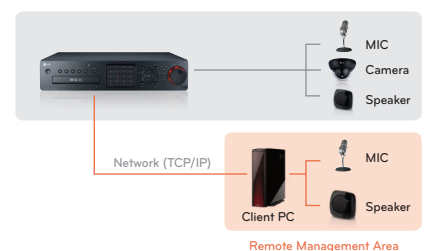

ATM/POS LINKAGE

ATM and POS data can be stored with visual data, thereby effectively responding to financial safety accidents.



LE5008D/4008D



EXCELLENT IMAGE QUALITY WITH H.264 COMPRESSION




HYBRID DIGITAL VIDEO RECORDER
16CH LE5016D/4016D, 8CH LE5008D/4008D

SPECIFICATIONS


Model			LE5016D/LE4016D	LE5008D/LE4008D
Video	Input	Analog Camera	16	8
		IP Camera	2	2
	Output	Loop Through	16	8
		Composite	1	1
		VGA	1	1
Audio	Input	Spot	1	1
			4	2
	Output		2	2
Alarm	Input		16	8
	Output		4	2
Recording	Alarm Notification to remote PC		Yes	
	Frame Rate (/sec)	NTSC	480 fps (LE5016D) / 480 fps (LE4016D) @ 352x240 480 fps (LE5016D) / 240 fps (LE4016D) @ 704x240 480 fps (LE5016D) / 120 fps (LE4016D) @ 704x480	240 fps (LE5008D) / 240 fps (LE4008D) @ 352x240 240 fps (LE5008D) / 120 fps (LE4008D) @ 704x240 240 fps (LE5008D) / 60 fps (LE4008D) @ 704x480
		PAL	400 fps (LE5016D) / 400 fps (LE4016D) @ 352x288 400 fps (LE5016D) / 200 fps (LE4016D) @ 704x288 400 fps (LE5016D) / 100 fps (LE4016D) @ 704x576	200 fps (LE5008D) / 200 fps (LE4008D) @ 352x288 200 fps (LE5008D) / 100 fps (LE4008D) @ 704x288 200 fps (LE5008D) / 50 fps (LE4008D) @ 704x576
	Quality Level		5 Levels	
	Recording Mode		Continuous / Alarm / Motion / Instant / Panic / Text	
Search	Playback Function		FF / FB / Frame Advance / Go to First / Go to Last	
	Search Mode		Calendar, Date/Time, Event (Motion, Alarm), Bookmark, Text	
Display	Frame Rate (/sec)	NTSC	480 fps	240 fps
		PAL	400 fps	200 fps
Storage	Division Mode		1, 4, 9, 16, 1+5, 1+7	
	Internal HDD		SATA II	
Backup	Backup Interface	Interface Type	Up to 4 HDDs	
		Max. Capacity	e-SATA	
Serial I/F	PTZ Control	Interface Type	Unlimited	
		Max. Capacity	Yes	
Network	Internal ODD		3 x USB 2.0 / 1 x e-SATA / Network	
	Backup Interface		Memory Stick / CD-RW / DVD-RW / External HDD	
Security	User Level Management	Supportable Device	RS-485 (x2)	
		Data Integrity Check (Watermark)	RS-232C (D-SUB9)	
Power Source	Network Connection		Ethernet 10 / 100 / 1000M, RJ-45	
	Network Transmission Speed		Up to 120 fps	
Operating Temperature / Humidity	NTP (Network Time Protocol)		Yes	
	Bandwidth Control		Yes	
Weight (w/o HDD)	User Level Management		Yes	
	Data Integrity Check (Watermark)		Yes	
Dimension (W x D x H)	AC Free 100~240V 50/60Hz		6.85 Kg	
	0°C ~ 40°C / 0% ~ 80%RH (Non-Condensing)		430 x 430 x 96 mm	

* Exact products and specifications shown may vary by geographic region and are subject to change without notice. Actual products may differ from the images appearing in the catalog.

DIMENSION

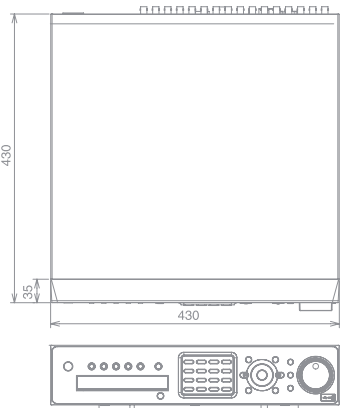

(Unit : mm)



Note : The accessories may be different depending on models.

FEATURES

- 2 IP + 16 Analog
- H.264 Compression
- Multiplex (Simultaneous Live/Playback, Recording, Backup, Networking)
- Various Recording Resolutions
- Real-Time Recording @ D1 (LE5016D/5008D)
- 2-Way Audio Support
- Real-Time Recording @ CIF (LE4016D/4008D)
- ATM / POS Linkage



The eco-friendly label is attached to those products which have passed LG Electronics' rigorous environmental criteria that evaluate 6 hazardous materials (lead, mercury, cadmium, etc.)



Business Solutions Company

Security Business Team
LG Twin Towers, 20 Yeouido-dong,
Yeongdeungpo-gu, Seoul 150-721, Korea
Phone : +82-2-3777-5184
Fax : +82-3777-5185
<http://www.lg.com/global/security>
E-mail : lgsecurity@lge.com

