


# UNV8510N

IPC3638SB-ADZK-I0



## 8MP HD Smart Bullet Network Camera

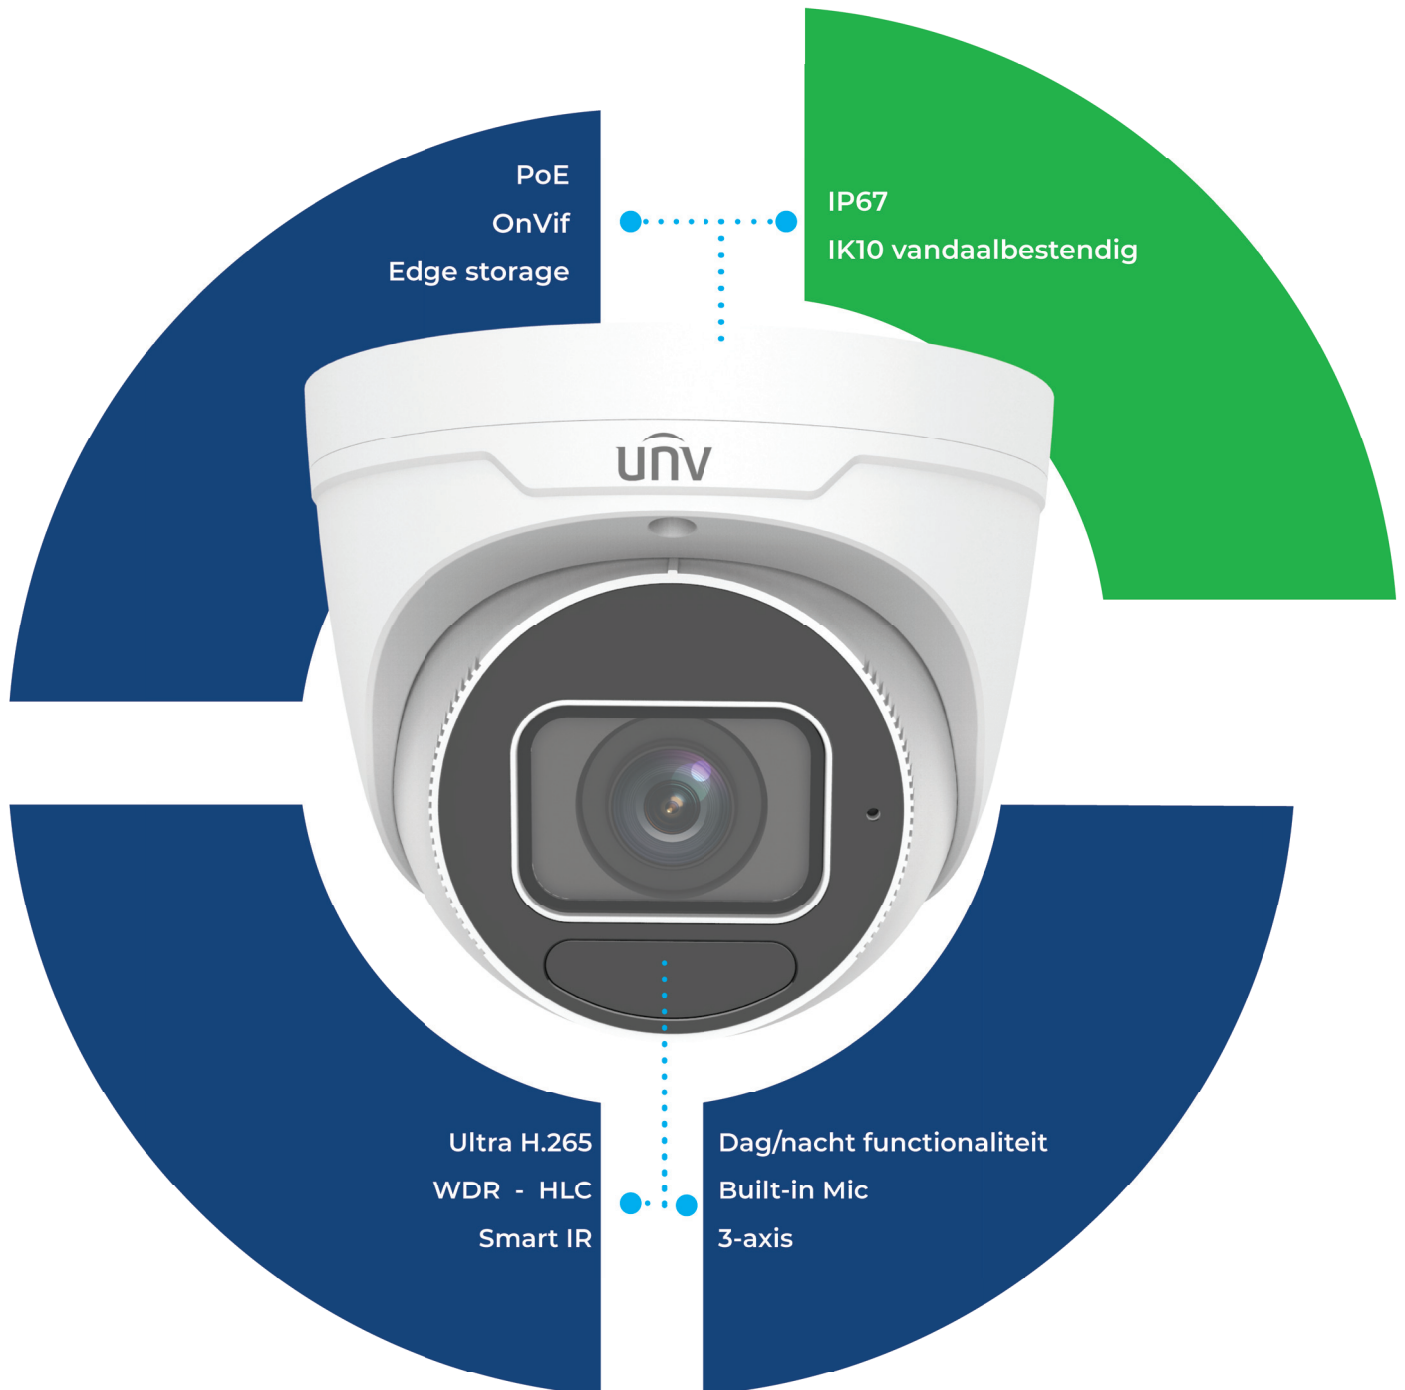

# security

by **nestor**  
company

Focus on **expertise**,  
supplier of **security**

### Meer weten over ons compleet assortiment?

Contacteer uw vertegenwoordiger of  
bezoek ons kenniscentrum.



### nestor company

E3-laan 93 9800 Deinze - Tel. 32 (0)9 380 40 20  
sales@nestorcompany.be - [www.nestorcompany.be](http://www.nestorcompany.be)

# specificaties


| CAMERA                                             |                                                                                                                                                                                                          |              |                   |                |                       |  |
|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------|----------------|-----------------------|--|
| Sensor                                             | 1/2.8", 8.0 megapixel, progressive scan, CMOS                                                                                                                                                            |              |                   |                |                       |  |
| Lens                                               | 2.8 ~ 12mm, AF automatische scherpstelling en gemotoriseerde zoomlens                                                                                                                                    |              |                   |                |                       |  |
| Gezichtshoek                                       | H: 106.25°~ 30.42°                                                                                                                                                                                       |              | V: 56.36°~ 17.22° |                | O: 110.34°~34.18°     |  |
| Dori distance                                      | Lens (mm)                                                                                                                                                                                                | Detectie (m) | Observer (m)      | Herkenning (m) | Indenticatie (m)      |  |
|                                                    | 2.8                                                                                                                                                                                                      | 86.9         | 34.8              | 17.4           | 8.7                   |  |
|                                                    | 12                                                                                                                                                                                                       | 372.4        | 149.0             | 74.5           | 37.2                  |  |
| Hoekverstelling                                    | Pan: 0° ~ 360°                                                                                                                                                                                           |              | Tilt: 0° ~ 90°    |                | Draai: 0° ~ 360°      |  |
| Minimum verlichting                                | Kleur: 0,003Lux (F1,6 - AGC on)                                                                                                                                                                          |              |                   | 0 Lux met IR   |                       |  |
| S/N                                                | >56dB                                                                                                                                                                                                    |              |                   |                |                       |  |
| WDR                                                | 120dB                                                                                                                                                                                                    |              |                   |                |                       |  |
| IR bereik                                          | tot 40m bereik                                                                                                                                                                                           |              |                   |                |                       |  |
| IR On/off control                                  | auto/manueel                                                                                                                                                                                             |              |                   |                |                       |  |
| Shutter                                            | auto/manueel, 1 ~ 1/100000s                                                                                                                                                                              |              |                   |                |                       |  |
| Dag/Nacht                                          | IR-cut filter met auto switch (ICR)                                                                                                                                                                      |              |                   |                |                       |  |
| Video compressie                                   | Ultra 265 , H.265 , H.264 , MJPEG                                                                                                                                                                        |              |                   |                |                       |  |
| H.264 profiel code                                 | Baseline profile , Main profile                                                                                                                                                                          |              |                   |                |                       |  |
| Frame rate                                         | Main Stream: 8MP (3840*2160), Max 20fps;5MP (3072*1728), Max 25fps; 4MP (2560*1440), Max25fps; 1080P (1920*1080), Max 30fps; Sub Stream: D1 (720*576), Max 30fps; Third Stream: CIF (352*288), Max 30fps |              |                   |                |                       |  |
| Video bit rate                                     | 128 Kbps ~ 16Mbps                                                                                                                                                                                        |              |                   |                |                       |  |
| OSD / ROI                                          | tot 8 areas                                                                                                                                                                                              |              |                   |                |                       |  |
| Privacy mask<br>Motion Detectie                    | tot 4 areas                                                                                                                                                                                              |              |                   |                |                       |  |
| Smart IR / Flip / Dewarping /<br>HLC / BLC / Defog | ondersteund                                                                                                                                                                                              |              |                   |                |                       |  |
| NETWORK                                            |                                                                                                                                                                                                          |              |                   |                |                       |  |
| Protocols                                          | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL                                                                                                |              |                   |                |                       |  |
| Compactibele integratie                            | ONVIF (Profile S, Profile G, Profile T), API                                                                                                                                                             |              |                   |                |                       |  |
| Netwerk                                            | 1 RJ45 10M/100M Base-Tx Ethernet                                                                                                                                                                         |              |                   |                |                       |  |
| Edge storage                                       | Micro SD, tot 256 GB                                                                                                                                                                                     |              |                   |                |                       |  |
| Network storage                                    | ANR,                                                                                                                                                                                                     |              |                   |                |                       |  |
| Smart Intrusion Prevention                         | Cross line, intrusion, enter area, leave area detectie                                                                                                                                                   |              |                   |                |                       |  |
| ALGEMEEN                                           |                                                                                                                                                                                                          |              |                   |                |                       |  |
| Voeding                                            | DC 12V±25%, PoE (IEEE 802.3af) ; verbruik: max 8.16W                                                                                                                                                     |              |                   |                |                       |  |
| Afmeting (Ø x H)                                   | Ø 129 x 110mm (Ø5.1" x 4.3")                                                                                                                                                                             |              |                   |                |                       |  |
| Netto gewicht                                      | 0.67kg (1.48lb)                                                                                                                                                                                          |              |                   |                |                       |  |
| Werkingsomgeving                                   | -30°C ~ 60°C (-22°F ~ 140°F, vochtigheid <95%RH (niet condenserend)                                                                                                                                      |              |                   |                |                       |  |
| Audio I/O & compressie                             | 1/1, G711                                                                                                                                                                                                |              |                   |                |                       |  |
| Veiligheid                                         | Overspanning: 6KV                                                                                                                                                                                        |              | IP67              |                | Anti-vandalisme: IK10 |  |
| Certificaten                                       | CE: EN 60950-1                                                                                                                                                                                           |              | UL: UL60950-1     |                | FCC: FCC Part 15      |  |

## afmetingen

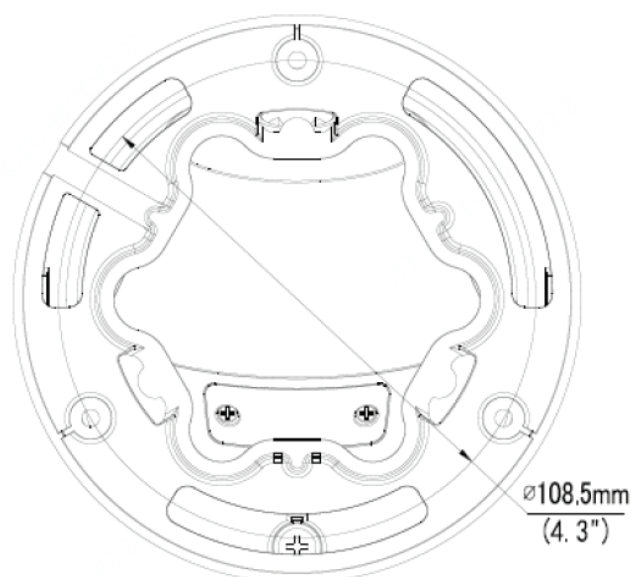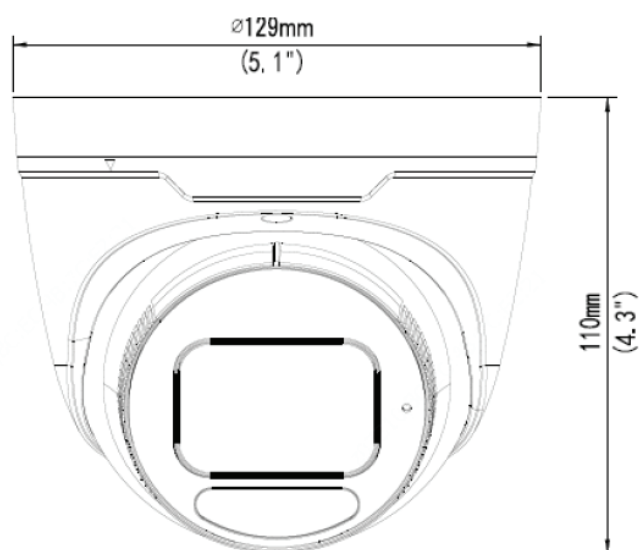

## accessoires

| UNVA008         | GPAU001      | UNVA010                 | UNVA016                 |
|-----------------|--------------|-------------------------|-------------------------|
| Back box bullet | Paal montage | Muur montage<br>Eyeball | Muur montage<br>eyeball |



### UNVA015

NPT 3/4" Plastic  
Waterproof joint

