

Eyeball camera

8MP HD Intelligent Light and Audible Warning
Fixed Eyeball Network Camera

UNV8514




- Imagerie de haute qualité grâce au capteur CMOS 1/2,8" de 8MP
- 8MP (3840*2160)@20fps ; 5MP (3072*1728)@30/25fps ; 4MP (2560*1440)@30/25fps ; 2MP (1920*1080)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- Protection intelligente du périmètre, avec détection des lignes transversales, des intrusions, des entrées et des sorties de zone
- Basée sur la classification des cibles, la prévention intelligente des intrusions réduit considérablement les fausses alarmes causées par les feuilles, les oiseaux, les lumières, etc., et se concentre avec précision sur les humains, les véhicules motorisés et les véhicules non motorisés.
- Comptage intelligent des flux de personnes et surveillance de la densité de la foule
- La technologie LightHunter garantit une qualité d'image très élevée dans les environnements faiblement éclairés.
- La technologie WDR 120dB permet d'obtenir une image claire en cas de forte luminosité.
- Prise en charge du mode couloir 9:16
- Microphone intégré
- Smart IR, jusqu'à 40 m de distance IR
- Prise en charge de la carte Micro SD 256 G
- Résistance au vandalisme IK10 et protection IP67



Camera					
Sensor	1/2.8", 8.0 megapixel, progressive scan, CMOS				
Objectif	2.8 ~ 12mm, AF automatic focusing and motorized zoom lens				
Angle of view	H : 106.7°		V: 57.1°		O: 115.7°
Dori Distance	Objectif (mm)	Detect (m)	Observe (m)	Recognize (m)	Identification (m)
	2.8	86.9	34.8	17.4	8.7
	12	372.4	149.0	74.5	37.2
Adjustment angle	Pan: 0° ~ 360°		Tilt: 0° ~ 75°		Rotation: 0 ~ 360°
Min illumination	Couleur: 0.0025Lux (F1.0, AGC ON)				
S/n	>56dB				
WDR	120dB				
Shutter	Auto/manuel , 1 ~ 1/100000s				
Illuminator					
IR distance	Jusque à 30m				
longueur de golfe	850nm				
IR on/off control	Auto / Manueel				
Video					
Video compressie	Ultra265, H.265, H.264, MJPEG				
H.264 profil code	Baseline profile, Main profile, High profile				
Frame rate	Main Stream: 8MP (3840*2160), Max 20fps; 5MP (3072*1728), Max 30fps; 4MP (2560*1440), Max 30fps; 1080P (1920*1080), Max 30fps; Sub Stream: 1080P (1920*1080), Max 30fps;720P (1280*720), Max 30fps; 640*360,Max 30fps; D1 (720*576), Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps; Third Stream: D1 (720*576), Max 30fps; 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps;				
Video bitrate	128 Kbps~16 Mbps				
U-code	Support				
ROI	Jusque à 8 zones				
Video stream	Triple streams				
OSD	Jusque à 8 OSD's				
Privacy masker	Jusque à 4 zones				
Images					
Whitebalance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2				
Image setting	Image rotation, brightness, saturation, contrast, sharpness, gain adjustable by web browser				
Digital noise reduction	2D/3D DNR				
Smart Illumination	Support				
Flip	Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise				
Dewarping	N/A				
HLC	Support				
BLC	Support				
Defog	Digital Defog				
Intelligent					
Smart intrusion prevention	Support false alarm filtering: Cross Line detection, Intrusion detection, Enter Area detection, Leave Area detection				
Statistical Analysis	People counting, support people flow counting and crowd density monitoring				
Basic Detection	Motion detection, Ultra motion detection, Tampering alarm, Audio Detection				
General Function	Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication				
Audio					
	Audio compression	Audio Bitrate	Suppression	Sampling rate	
	G.711	64 Kbps	Support	8KHz	
Storage					
Edge storage	Micro SD, tot 256Gb				
Network storage	ANR, NAS(NFS)				

Network	
Protocols	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP, SSL/TLS, SSH
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API, SDK
User/Host	Up to 32 users. 2 user levels: administrator and common user
Security	Password protection, Strong password, HTTPS encryption, Export operation logs, Basic and digest authentication for RTSP, Digest authentication for HTTP, TLS 1.2, WSSE and digest authentication for ONVIF
Client	EZStation, EZView, EZLive
Web Browser	Plug-in required live view: IE 10 and above, Chrome 45 and above, Firefox 52 and above, Edge 79 and above
	Plug-in free live view: Chrome 57.0 and above, Firefox 58.0 and above, Edge 16 and above
Interface	
Audio I/O	N/A
Alarm I/O	N/A
RS485	N/A
Built-in mic	Support
Built-in speaker	N/A
WIFI	N/A
Network	1 RJ45 10M/100M Base-TX Ethernet
Video output	N/A
Certifications	
EMC	CE-EMC (EN 55032: 2015+A1:2020, EN 61000-3-3: 2013+A1: 2019, EN IEC 61000-3-2: 2019+A1: 2021, EN 55035: 2017+A11:2020) FCC (FCC CFR 47 part15 B, ANSI C63.4-2014)
Safety	CE LVD (EN 62368-1:2014+A11:2017) CB (IEC 62368-1:2014) UL (UL 62368-1, 2nd Ed., Issue Date: 2014-12-01)
environment	CE-ROHS (2011/65/EU; (EU)2015/863); WEEE (2012/19/EU); REACH (Regulation (EC) No 1907/2006)
Protection	IP67 (IEC 60529:1989+AMD1:1999+AMD2:2013) IK10 (IEC 62262:2002)
General	
Power	DC 12V±25%, PoE (IEEE 802.3af) Power consumption: Max 9.0W
Power Interface	Ø 5.5mm coaxial power plug
Dimensions (Ø x H)	Ø129 x 110mm (Ø5.1" x 4.3")
Weight	0.69kg (1.52lb)
Material	metal
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Storage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
surge protection	6KV
Reset Button	N/A

dimensions

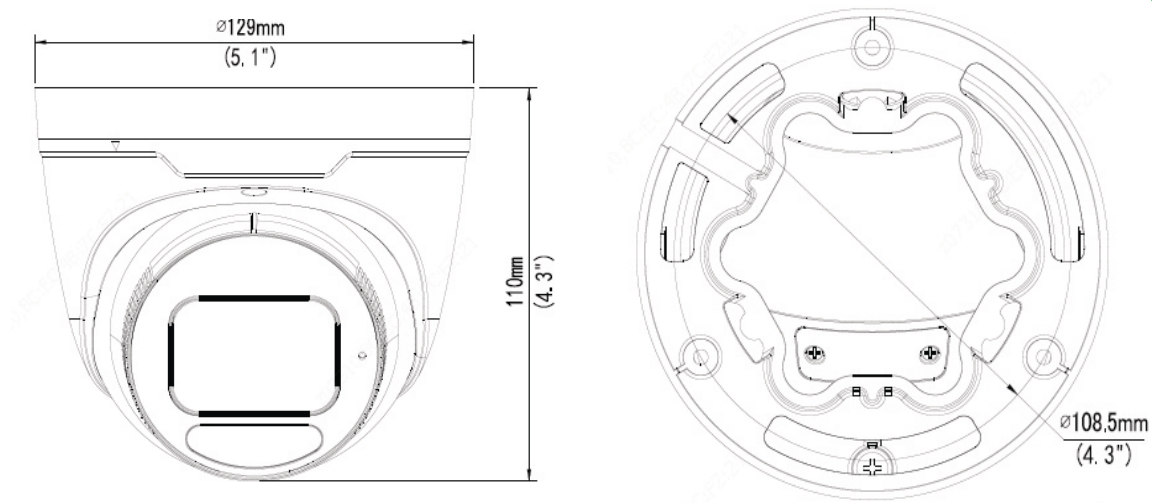

accessoires



UNVA015



UNVA012



UNVA807



UNVA009

Vous voulez en savoir plus sur notre gamme complète ?
Contactez votre représentant ou visitez notre
centre de connaissances..

nestor company

E3-Iaan 93 9800 Deinze - Tel. 32 (0)9 380 40 20
sales@nestorcompany.be - www.nestorcompany.be