

UNVR204L

NVR301-04LB-P4



Sortie simultanée HDMI et VGA
Supporte HDMI 1-ch, VGA 1-ch4

Caméras IP tierces prises en charge avec conformité à l'ONVIF
Entrée IP à 4 canaux



Ultra H.265
1 disque dur SATA, jusqu'à 6 To
Soutenir la mise à niveau du cloud computing

Plug & Play avec 4 interfaces de réseau PoE indépendantes
Enregistrement de résolution

versionr. 1.0

security

by **nestor**
company

Focus on **expertise**,
supplier of **security**

Vous souhaitez en savoir plus sur notre gamme complète ?

Contactez votre représentant ou visitez notre centre de connaissances.

nestor company


E3-laan 93 9800 Deinze - Tel. 32 (0)9 380 40 20

sales@nestorcompany.be - www.nestorcompany.be

spécifications

VIDEO/AUDIO INPUT	
IP Video Input	4 channels
NETWORK	
Bande passante entrante	40Mbps
Bande passante sortante	40Mbps
Utilisateurs à distance	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
VIDEO/AUDIO OUTPUT	
HDMI/VGA Output	HDMI: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1 920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Résolution d'enregistrement	1080p/960p/720p/D1/2CIF/CIF
Lecture synchrone	4 channels
Écran du mode "Corridor	3/4
DECODING	
Decoding format	Ultra 265/H.265/H.264
Liveview/Playback	1080p/960p/720p/D1/2CIF/CIF
Capacité	4 x 1080p@20, 4 x 720p@30
DISQUE DUR	
SATA	1 SATA interface
Capacité	Up to 6TB for each disk
SMART	
Détection de l'ACV	Face detection, Intrusion detection, Cross line detection, Audio detection
EXTERNAL INTERFACE	
Ethernet	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB	Rear panel: 2 x USB2.0
PoE	
Interface	4 independent 100 Mbps PoE network interfaces
Max Power	Max 30W for single port Max 54W in total (13.5W for each)
Supported standard	IEEE 802.3at, IEEE 802.3af
GENERAL	
Alimentation	48V DC ; Power Consumption: ≤5 W (without HDD)
Dimension	205mm × 205mm × 47mm (8.1" × 8.1" × 1.9")
Poids (sans DD)	0.64kg (1.41lb)

dimensions

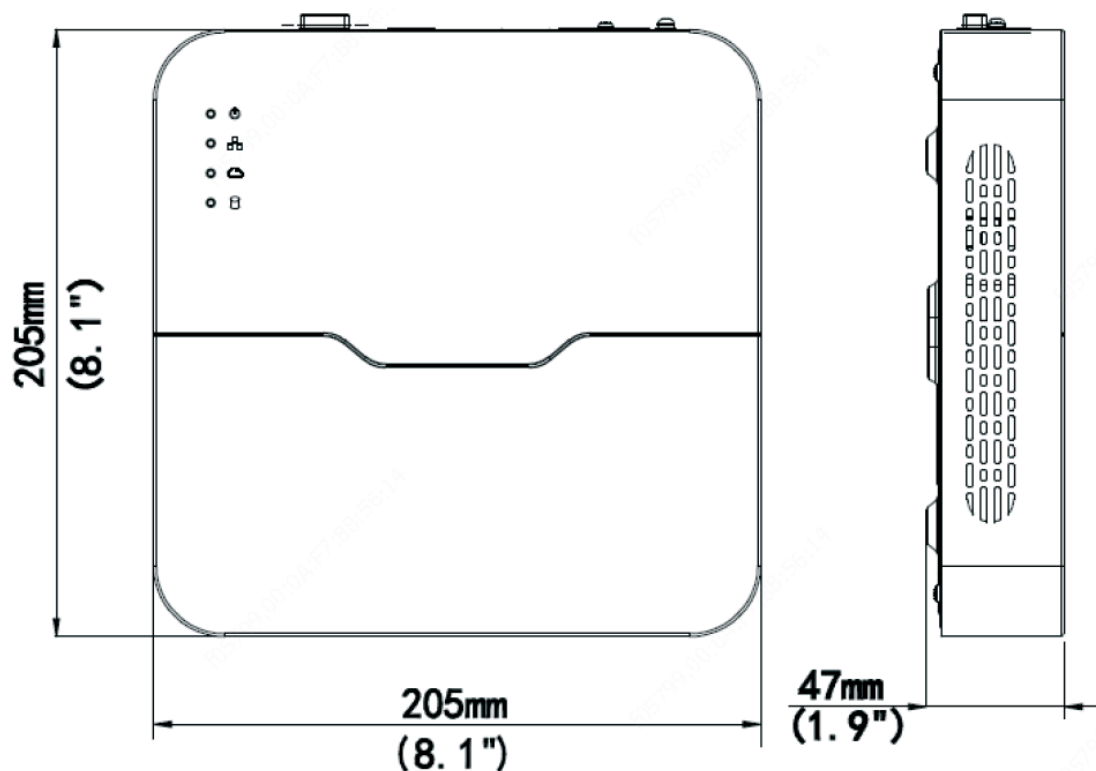

arriere

