

UNVR204L

NVR301-04LB-P4



HDMI en VGA output
4 Kanaals IP input

IP-camera's van derden die
worden ondersteund met
ONVIF-conformiteit



Ultra H.265
Tot 2MP-resolutie opname
1 SATA HDD, tot 6TB

Plug & Play met 4 onafhanke-
lijke PoE netwerkinterfaces
Support cloud upgrade

versienr. 1.0

security

by **nestor**
company

Focus on **expertise**,
supplier of **security**

Meer weten over ons compleet assortiment?

Contacteer uw vertegenwoordiger of
bezoek ons kenniscentrum.


nestor company

E3-laan 93 9800 Deinze - Tel. 32 (0)9 380 40 20
sales@nestorcompany.be - www.nestorcompany.be

specificaties

VIDEO/AUDIO INPUT	
IP Video Input	4 channels
NETWORK	
Incoming Bandwidth	40Mbps
Outgoing Bandwidth	40Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
VIDEO/AUDIO OUTPUT	
HDMI/VGA Output	HDMI: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1 920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback	4 channels
Corridor Mode Screen	3/4
DECODING	
Decoding format	Ultra 265/H.265/H.264
Liveview/Playback	1080p/960p/720p/D1/2CIF/CIF
Capability	4 x 1080p@20, 4 x 720p@30
HARD DISK	
SATA	1 SATA interface
Capacity	Up to 6TB for each disk
SMART	
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection
EXTERNAL INTERFACE	
Ethernet	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB	Rear panel: 2 x USB2.0
PoE	
Interface	4 independent 100 Mbps PoE network interfaces
Max Power	Max 30W for single port Max 54W in total (13.5W for each)
Supported standard	IEEE 802.3at, IEEE 802.3af
GENERAL	
Power Supply	48V DC ; Power Consumption: ≤5 W (without HDD)
Dimension	205mm × 205mm × 47mm (8.1" × 8.1" × 1.9")
Weight (without HDD)	0.64kg (1.41lb)

afmetingen

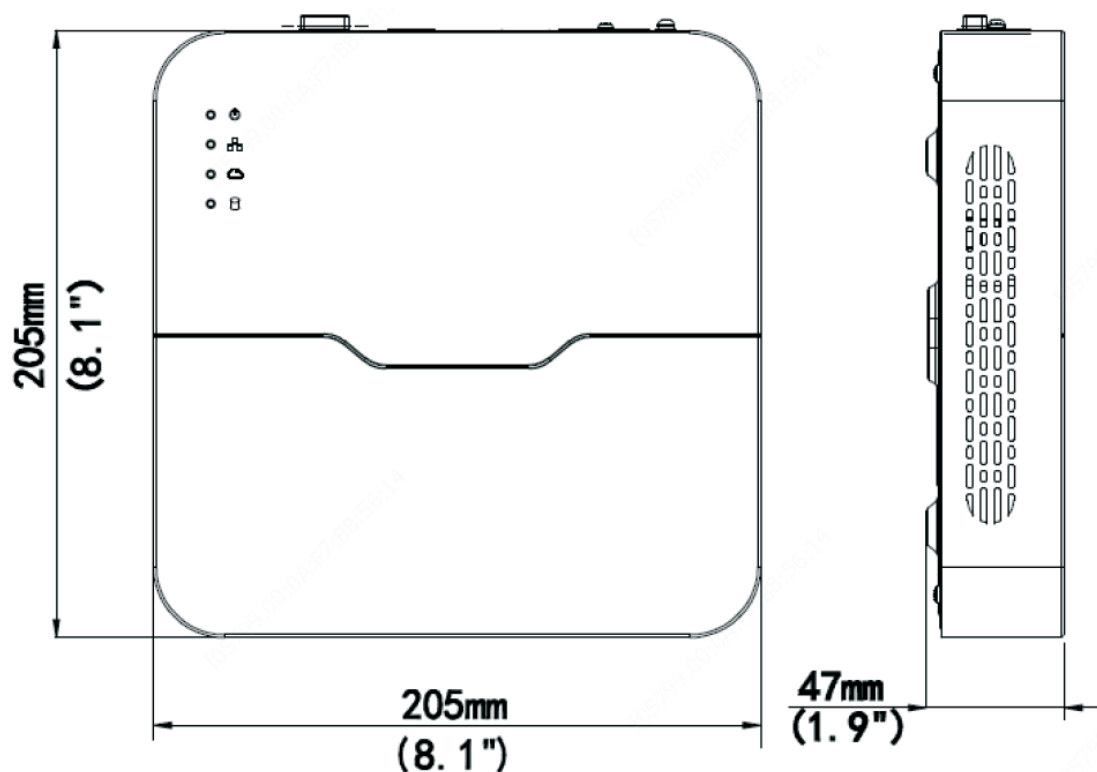

achterzijde

