

UNVR216N

NVR302-S2-P Serie



Simultaneous HDMI
and VGA output
16 Channel input

HDMI - 4K resolution
Up to 4K resolution recording



Ultra H.265
2 SATA up to 10TB each
Support cloud upgrade

Onvif
ANR

version: 1.0

security

by **nestor**
company

Focus on **expertise**,
supplier of **security**

Vous souhaitez en savoir plus sur notre gamme complète ?

Contactez votre représentant ou visitez notre centre de connaissances.

nestor company


E3-laan 93 9800 Deinze - Tel. 32 (0)9 380 40 20

sales@nestorcompany.be - www.nestorcompany.be

specifications

VIDEO/AUDIO INPUT	
IP Video Input	16 channels
Two-way Audio Input	1 channel, RCA
NETWORK	
Incoming Bandwidth	160Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
VIDEO/AUDIO OUTPUT	
HDMI/VGA Output	HDMI: 4K (3840x2160@30), 1920X1080@60, 1920X1080@50, 1600X1200@60, 1280X1024@60, 1280X720@60, 1024X768@60 VGA: 1920X1080@60, 1920X1080@50, 1280X1024@60, 1280X720@60, 1024X768@60, 1024x768/60Hz
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1 channel RCA
Synchronous Playback	16 channels
Corridor mode screen	3/4/5/7/9/10/12/16
Decoding	
Decoding format	Ultra 265/H.265/H.264
Liveview/Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	2 x 4K@30, 4x 4MP@30, 5 x 3MP@30, 8 x 1080P@30, 16 x 720P@30
HARD DISK	
SATA	2 SATA interface
Capacity	Up to 10TB for each disk
SMART	
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking, Object Left Behind, Object Removed
VCA Search	Face search, Behavior search
Statistical Analysis	People counting
EXTERNAL INTERFACE	
Ethernet	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB	Front panel: 1 x USB2.0 , Rear panel: 1 x USB3.0
Alarm in	4 channels
Alarm out	1 channel
PoE	
Interface	16 independent 100 Mbps PoE network interfaces
Max Power	Max 30W for single port Max 240W in total
Supported Standard	IEEE 802.3at, IEEE 802.3af
GENERAL	
Power Supply	100 ~ 240 V AC ; Power Consumption: ≤10 W (without HDD)
Dimension	380mm x315mm x 53mm (14.9" x 12.4" x2.1")
Weight (without HDD)	≤2.6kg (5.29lb)
Working Environment	--10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)

dimensions

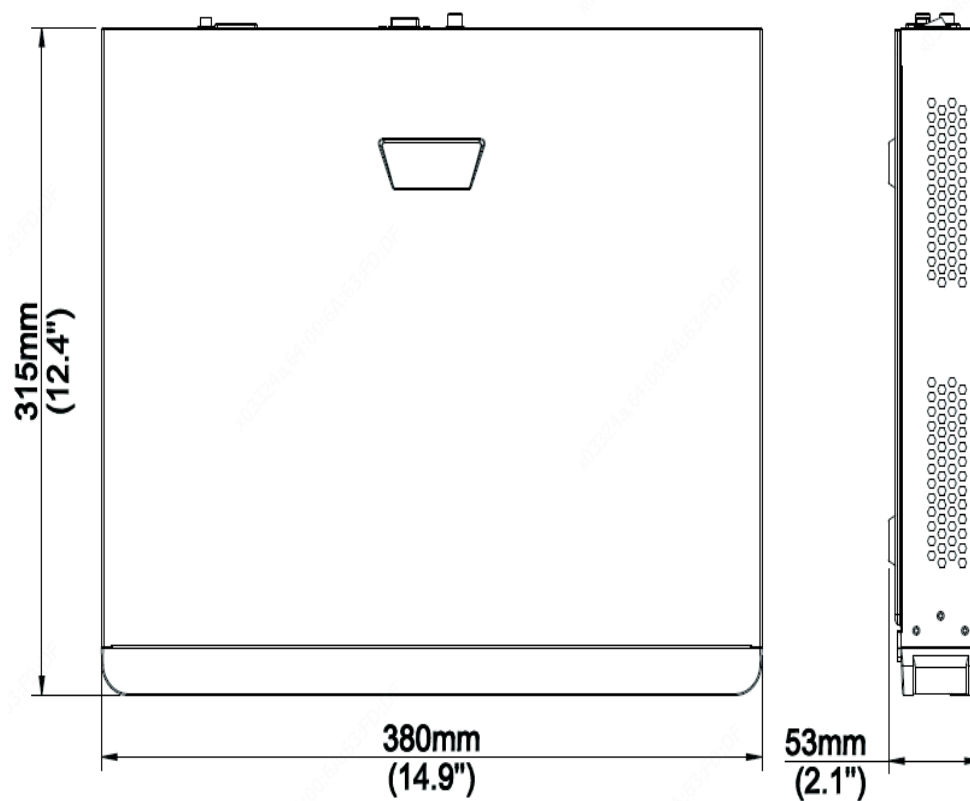

rear panel

