

UNVR314N

XVR301-Q Series



HDMI en VGA output
4 Kanaals BNC input

Ondersteunt TVI, AHD, CVI,
CVBS, IP-camera's met
adaptieve toegang



Ultra H.265
Ondersteuning van audio
over coaxkabel

Lange overdrachtsafstand
over coaxkabel

versienr. 1.0

security

by **nestor**
company

Focus on **expertise**,
supplier of **security**

Meer weten over ons compleet assortiment?

Contacteer uw vertegenwoordiger of
bezoek ons kenniscentrum.


nestor company

E3-laan 93 9800 Deinze - Tel. 32 (0)9 380 40 20
sales@nestorcompany.be - www.nestorcompany.be

specificaties

VIDEO/AUDIO INPUT	
Analoge Video Input	4 kanaals BNC
IP Video Input	2-ch(only IP up to 6ch), each channel up to 4K
Ondersteunde Analoge Camera Types	Support AHD input: 8MP@15fps(channel1); 5MP@20fps; 4MP@30fps; 3MP@30fps(channel1); 1080P@30fps; 720P@60fps Support TVI input: 8MP@15fps(channel1); 5MP@20fps; 4MP@30fps; 3MP@20fps (channel1); 1080P@30fps; 720P@60fps Support CVI input: 8MP@15fps(channel1); 5MP@20fps; 4MP@30fps; 1080P@30fps; 720P@30fps Support CVBS input
Audio Input	1 kanaal RCA
Two-way Audio Input	1 kanaal, RCA
NETWORK	
Inkomende Bandbreedte	48Mbps
Uitgaande Bandbreedte	60Mbps
Externe gebruikers	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
VIDEO/AUDIO OUTPUT	
HDMI/VGA Output	HDMI: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
CVBS Output	1 kanaal BNC
Audio Output	1 kanaal, RCA
Synchronous Playback	4 kanalen
Encoding	
Recording frame rate	Main stream: 8MP Lite@8fps(channel1); 5MP Lite@12fps; 4MP Lite@15fps; 3MP@15fps(channel1); 2MP@15fps; 720P@30fps; Sub stream: D1@30fps(Max);
Recording resolution	8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
HARD DISK	
SATA	1 SATA interface
Capacity	Up to 6TB for each disk
SMART	
VCA Detectie	1-ch Intrusion detection and cross line detection on analog camera
VCA Zoeken	Behavior search on analog camera
EXTERNAL INTERFACE	
Ethernet	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB	Rear panel: 2 x USB2.0
Serial Interface	1 x RS485
GENERAL	
Voeding	12V DC ; Power Consumption: ≤8 W (without HDD)
Afmetingen	260mm ×240mm× 46mm (10.2" × 9.4"×1.8")
Gewicht (zonder HDD)	≤1.1kg (4.19lb)
Werkingsomgeving	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)

afmetingen

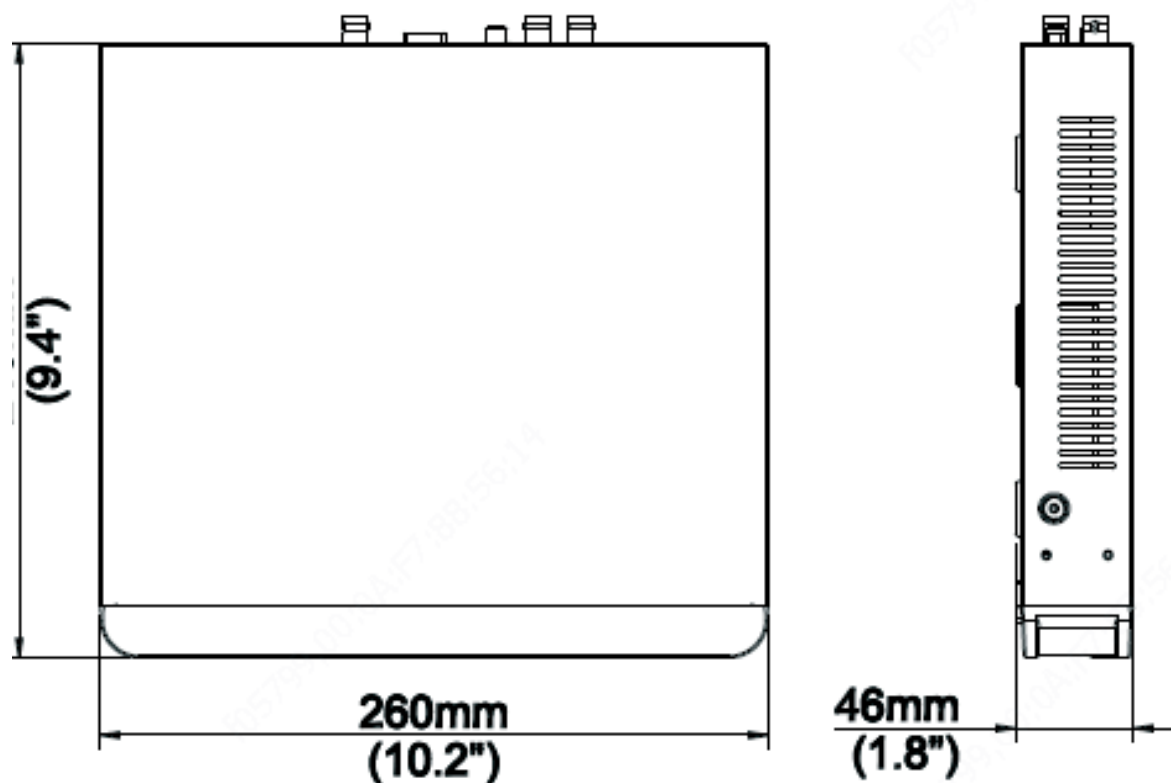

achterzijde

