


UNVR328N

XVR302-08U-IF



- HDMI en VGA output
- 8 Kanaals BNC input
- Tot 18Mp resolutie voor opname

- Ondersteunt TVI, AHD, CVI, CVBS, IP-camera's met adaptieve toegang
- Tot 4K HDMI out
- VGA out tot 1920*1080

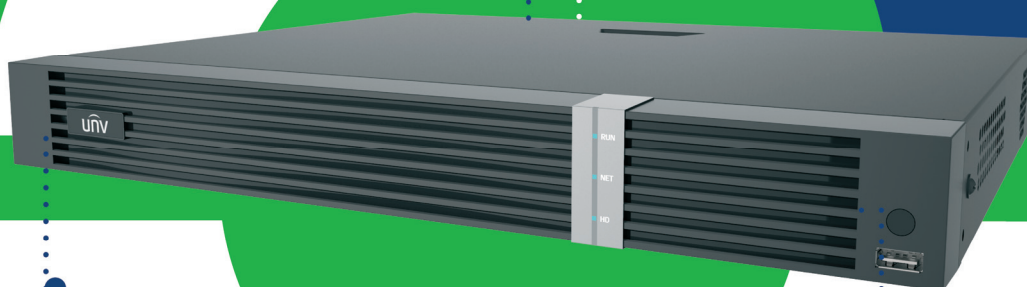

- Ultra H.265
- Ondersteuning van audio over coaxkabel
- Tot 16 gezichtsbibliotheken, totale capaciteit van 100000 gezichtsbeelden

- Lange overdrachtsafstand over coaxkabel
- Ondersteuning 1-kanaals gezichtsherkenning met analoge camera of IPC van derden
- Ondersteuning 4-kanaals gezichtsherkenning met UNV gezichtsopname IPC

versienr. 1.0

security

by **nestor**
company

Focus on **expertise**,
supplier of **security**

Meer weten over ons compleet assortiment?

Contacteer uw vertegenwoordiger of
bezoek ons kenniscentrum.

nestor company


E3-laan 93 9800 Deinze - Tel. 32 (0)9 380 40 20

sales@nestorcompany.be - www.nestorcompany.be

specificaties

VIDEO/AUDIO INPUT	
Analoge Video Input	8 kanaals BNC
IP Video Input	8-ch(only IP up to 16ch), each channel up to 4K
Ondersteunde Analoge Camera Types	Support AHD input: 8MP@15fps(channel1); 5MP@20fps; 4MP@30fps; 3MP@30fps(channel1); 1080P@30fps; 720P@60fps Support TVI input: 8MP@15fps(channel1); 5MP@20fps; 4MP@30fps; 3MP@20fps (channel1); 1080P@30fps; 720P@60fps Support CVI input: 8MP@15fps(channel1); 5MP@20fps; 4MP@30fps; 1080P@30fps; 720P@60fps Support CVBS input
Audio Input	1 kanaal RCA
Two-way Audio Input	1 kanaal, RCA
NETWORK	
Inkomende Bandbreedte	80Mbps
Uitgaande Bandbreedte	64Mbps
Externe gebruikers	128
Protocols	TCP/IP,P2P, UPnP, NTP, DHCP, PPPoE
VIDEO/AUDIO OUTPUT	
HDMI/VGA Output	HDMI: 4K(3840X2160)/30Hz,1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz,1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
CVBS Output	1 kanaal BNC
Audio Output	1 kanaal, RCA
Synchronous Playback	8 kanalen
Encoding	
Recording frame rate	Main stream: 8MP Lite@8fps(channel1-chanel 4); 5MP Lite@12fps; 4MP Lite@15fps; 3MP@15fps(channel1); 2MP@15fps; 720P@30fps; Sub stream: D1@30fps(Max);
Recording resolution	8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
HARD DISK	
SATA	2 SATA interface
Capacity	Up to 6TB for each disk
EXTERNAL INTERFACE	
Ethernet	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB	Rear panel: 1 x USB 3.0 Front Panel: 1 x USB 2.0
Serial Interface	1 x RS485
Alarm IN	8
Alarm Out	4
GENERAL	
Voeding	12V DC ; Power Consumption: ≤12 W (without HDD)
Afmetingen	380mm ×318mm× 53.5mm (14.96" × 12.51"×2.1")
Gewicht (zonder HDD)	≤2.0 Kg (4.4lb)
Werksomgeving	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)

afmetingen

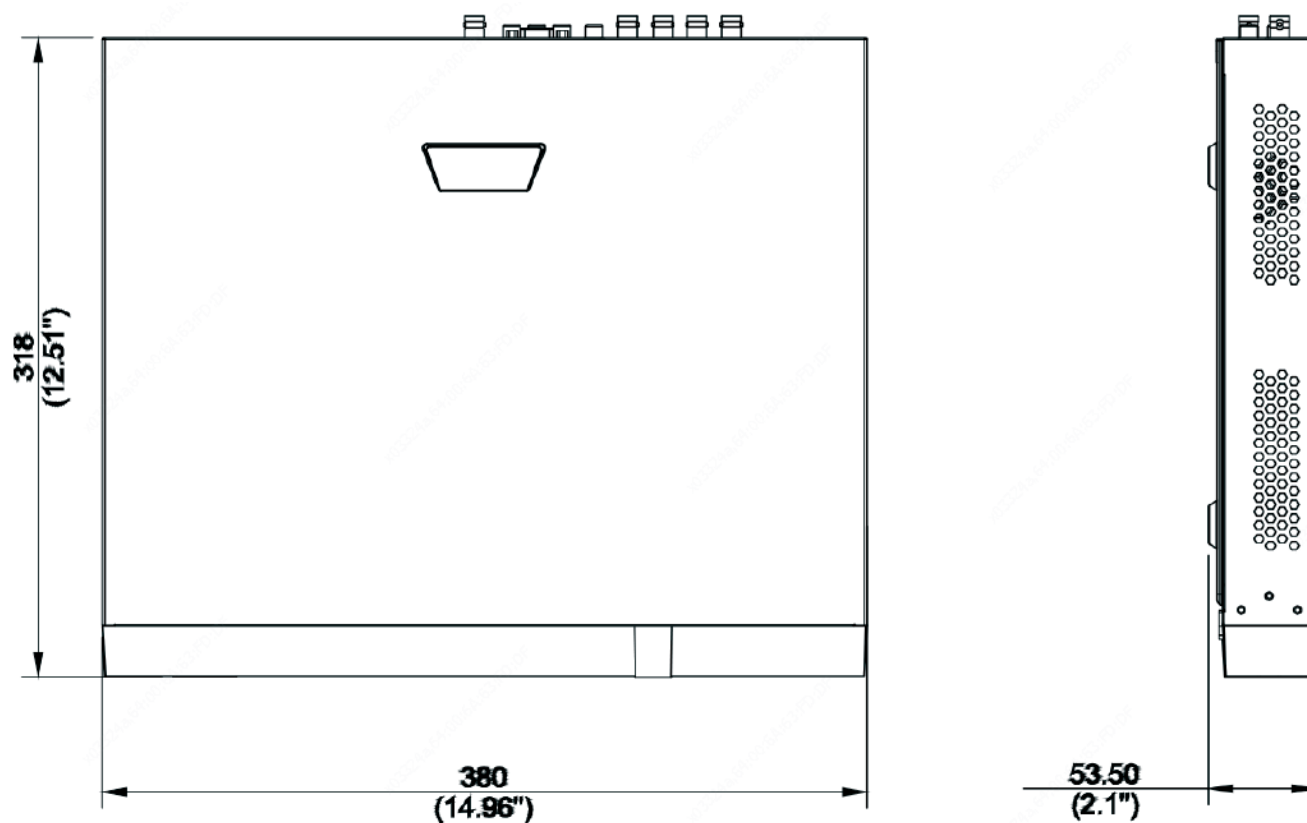

achterzijde

