





SIMPLE ENERGY SAVING DEVICE

- Supply: 20 Vca 10% of tolerance
- Frequency: 50 Hz.
- Projecting relays: 1 Relay.
 - Cutting power: 10A, 250V ~, cos. =1
6A, 250V ~, cos. =0.6
 - Incandescence max. charge 8A. – Halogen max. charge 8A.
 - In case of higher charge or inductive charge, cold light, halogen or electronic fluorescent lamps, it is recommended to install also a "contactor" (not supplied)

DIMENSIONS

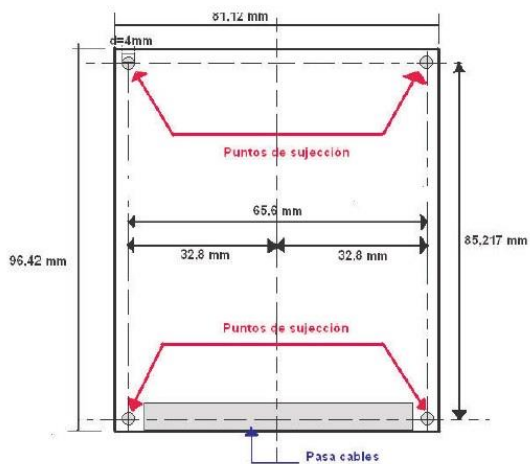

SIMPLE MODEL CONNEXION SKETCH

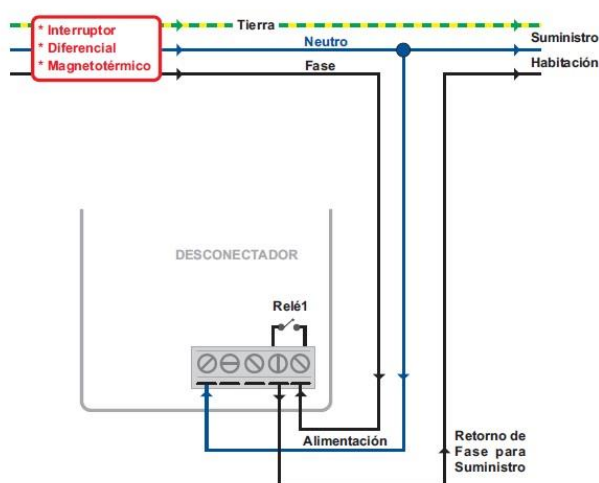

BESTELCODES / REFERENCES DE COMMANDE

schakelaar WIT interrupteur BLANC **DRS100**

schakelaar GRIJS interrupteur GRIS **DRS101**

