

RTT

1 RELAY REMOTE UNIT AND REQUEST-TO-EXIT BUTTON

RTT is a remote relay control unit that can work with the B100-SA/DINB100-SA biometric readers and the MTPX-MF-SA/DINMTPX-MF-SA MIFARE proximity readers. If secure installation is needed, the biometric reader can be connected to remote relay unit at secured area, which also plays the role of exit push button. It has one relay output and one exit button input.



RTT ARROW
Ref.ACC875



RTT EXIT

FEATURES

Output:	1 x Relay (2A/24 V AC/DC)
Push Button Input:	Yes
Door time	Pulse (1 to 60 s) or Toggle (ON/OFF)
Button type: electronic touch sensor	
Backlight ON/OFF:	Yes
Buzzer ON/OFF:	Yes
Voltage:	9-14 V DC
Current Consumption:	60 mA
Mounting:	Surface mount
Operating Temperature:	-20° to 50°C non condensing
IP Factor:	IP65
Dimension (mm):	92L x 51W x 25D

Black Edition

Product available in black ABS

RELATED PRODUCTS



MTPX-MF-SA
Ref.ACC765MF-SA



DINMTPX-MF-SA
Ref. DIN006





B100-SA
Ref. ACC872




DINB100-SA

APPLICATION DIAGRAM

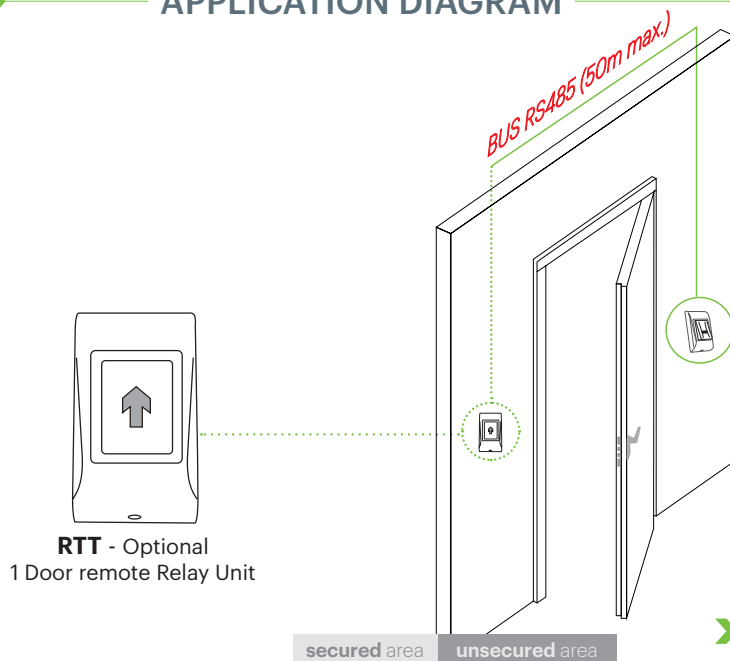


B100-SA
Standalone
Biometric Reader
Ref. ACC872

OR



MTPX-MF-SA
Standalone
MIFARE Reader
Ref.ACC765MF-SA


DIMENSIONS

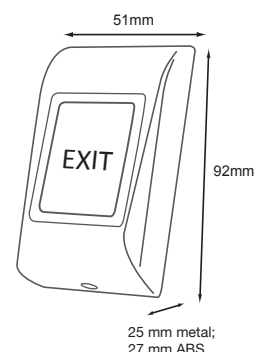


VERSIONS



RTTS
Silver - Metal



RTTC
Charcoal - Metal



RTTBK
Black - ABS

All product specifications are subject to change without notice.