



IGDB1260-LDRET PTO



IGDB1260-LDRET PTL

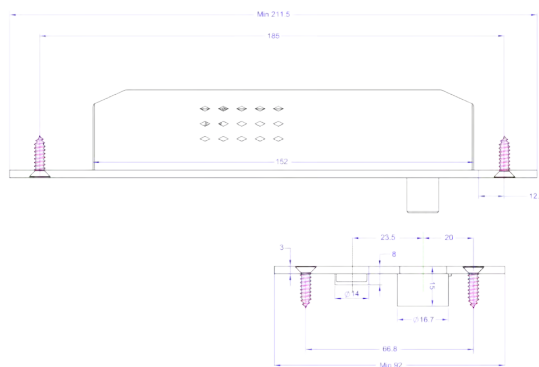

Main features:

Type	Fail Secure	Fail safe
Mounting	Mortise	
Voltage	12VDC/24VDC	
Current (Low Power Consumption)	Peak: 1,15A/0,62A Stand by: 220mA/120mA	Peak: 0,9A/0,45A Syand by: 220mA/120mA
Locking monitoring	Micro-Relay + Led	
Door position monitoring	Micro-Relay + Led	
Internal Timer	Yes - 0, 3, 6 and 10 sec	Yes 0 to 10 sec
Corrosion Proof	Salt spray test. ISO 9227, ASTM B-117 90	
Protection	Internal IC circuit to protect fail locking	
Built-in MOV Surge Protection	Yes - Varistors	
Auto-Lock function	Yes	
Warranty	2 years	

Mechanical features

Size Body: LxWxH	152 x 23 x 33mm (anodised aluminium)	142 x 32 x 40
Size Front Plate: LxWxH	212 x 25 x 3mm (stainless steel)	204 x 38 x 3
Size Bolt: Diameter	13 x 14.5mm	
Weight	~ 0.7 kg	

IGDB1200M-LDRET

